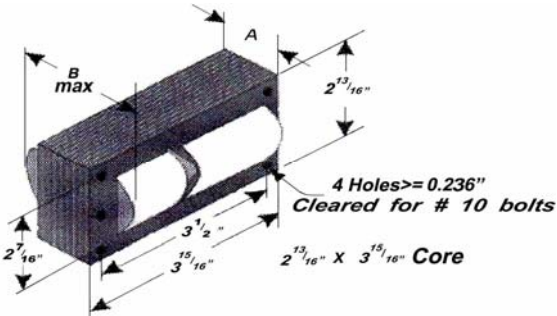
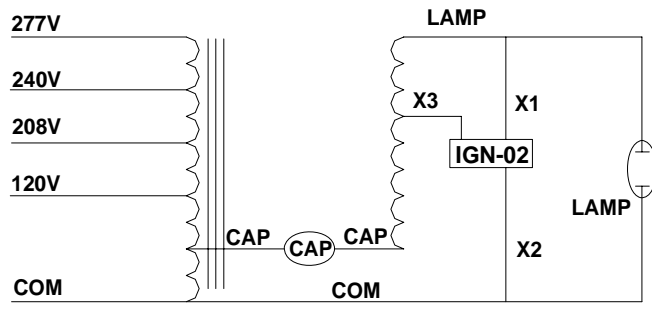
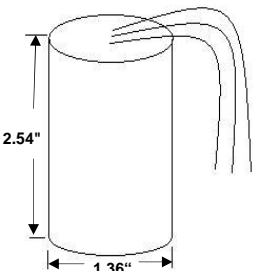
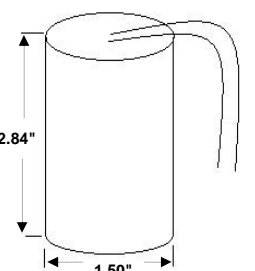


E-BAL-H200-AMT60N-PS	
Ballast Type	<b>Metal Halide</b>
Lamp	<b>200W M136</b>
Circuit Type	<b>Pulse Start CWA</b>
Input Frequency	<b>60HZ</b>


Model No: E-BAL-H200-AMT60N-PS					Capacitor (Required)		
Input Voltage	120	208	240	277	Capacitance	12uF±3%	
Operating Current	2.0	1.2	1.0	0.9	Minimum Volts	330V	
Open Circuit Current	2.4	1.4	1.2	1.1	Dry	Diameter	1.50"
Starting Current	1.8	1.8	1.8	1.8		Height	2.84"
CCF (*ANSI≤1.8)	1.8	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	2.2	2.2	2.2	Ignitor (Required)		
	Input	0.8	0.5	0.4	0.3	Ignitor Model	IGN-02
Recommended Fuse	6	4	3	3	Pulse Height(kV)	3.0~4.0	
Input Voltage At Lamp Dropout					Pulse Width (≥u S)	1.3 @ 2.7	
UL 1029 Bench Top Rise	A	B	A	A	Regulation		
OCV(Min.)	254				Line Volts	±10%	
Input Power	227.2W				Lamp Watts	±10%	
Power Factor	≥90%				Insulation System		
Regulation	Line Volts	Class H, 180°C					
	Lamp Watts						
Ballast Dimension	A	2.76"					
	B	4.22"					
Ballast Net Weight	8.8 lbs						
Leads	12"-Cross Link Polyolefin						
					Min.Starting Temp.	-20°F / -30°C	

Ballast Dimension	Wiring Diagram
	
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.

 - 2009 Energy Code Compliant.