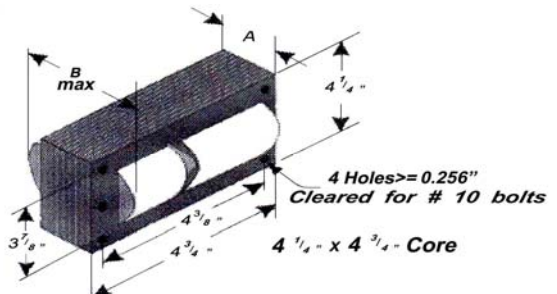
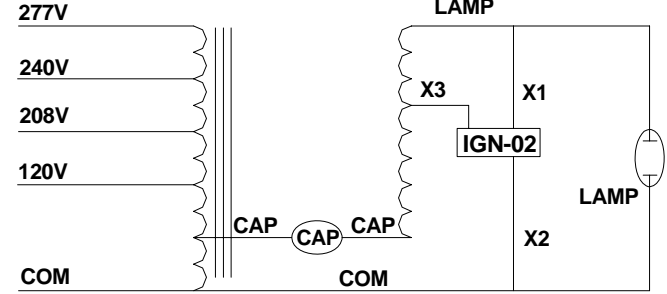
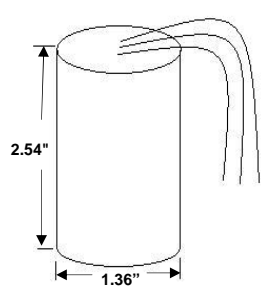
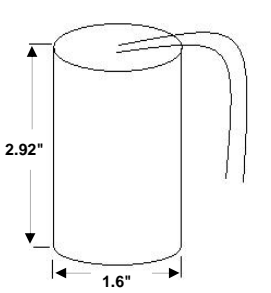


E-BAL-S025M4	
Ballast Type	High Pressure Sodium
Lamp	250W S50
Circuit Type	CWA
Input Frequency	60HZ

Model No: E-BAL-S025M4		Capacitor (Required)						
Input Voltage	120	208	240	277	Capacitance	35uF±3%		
Operating Current	2.5	1.5	1.3	1.1	Minimum Volts	240V		
Open Circuit Current	2.0	1.2	1	0.9	Dry	Diameter	1.6"	
Starting Current	4.2	4.2	4.2	4.2		Height	2.92"	
CCF (*ANSI≤1.8)	1.8	1.8	1.8	1.8	Short Circuit Current	Case Max. Temperature		100°C
Secondary	4.2	4.2	4.2	4.2				
Input	1.6	0.9	0.85	0.75				
Recommended Fuse	7	4	4	3	Ignitor (Required)			
Input Voltage At Lamp Dropout					Ignitor Model	IGN-02		
UL 1029 Bench Top Rise	B	A	A	A	Pulse Height(kV)	2.5~4.0		
OCV(Min.)	175				Pulse Width (≥u S)	1us @ 2250V		
Input Power	295W							
Power Factor	≥90%							
Regulation	Line Volts	±10%						
	Lamp Watts	±10%						
Insulation System	Class H, 180°C							
Ballast Dimension	A	1.82"						
	B	3.7"						
Ballast Net Weight	11.2 lbs							
Leads	12"-Cross Link Polyolefin							
						Min.Starting Temp.	-20°F / -30°C	

Ballast Dimension	Wiring Diagram
	
Ignitor	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.