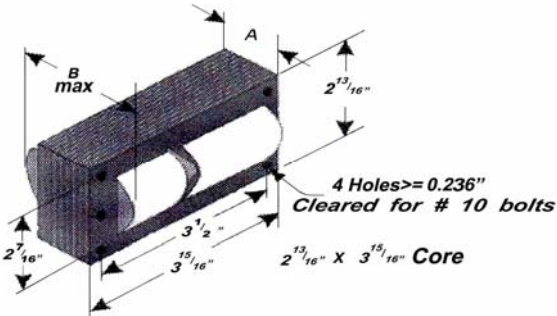
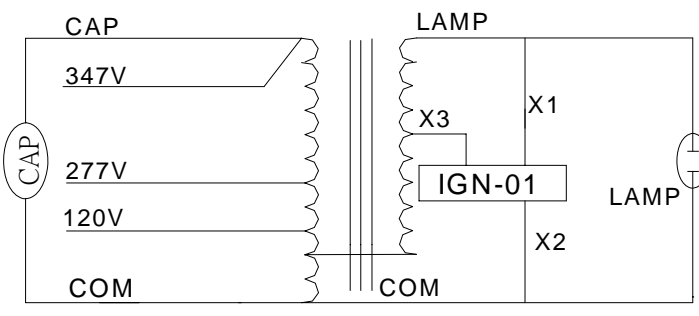
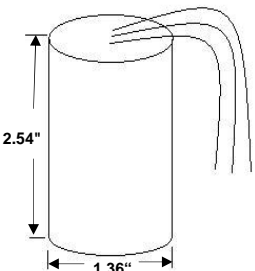
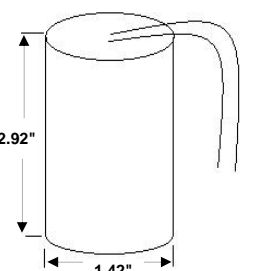


E-BAL-S100-A0360N	
Ballast Type	High Pressure Sodium
Lamp	100W S54
Circuit Type	HX-HPF
Input Frequency	60HZ

Model No: E-BAL-S100-A0360N				Capacitor (Required)		
Input Voltage	120	277	347	Capacitance	10uF±3%	
Operating Current	2.2	0.9	0.7	Minimum Volts	280V	
Open Circuit Current	2.7	1.0	0.8	Dry	Diameter	1.42"
Starting Current	3.1	3.1	3.1		Height	2.92"
CCF (*ANSI≤1.8)	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	3.1	3.1	Ignitor (Required)		
	Input	1.2	0.6	Ignitor Model	IGN-01	
Recommended Fuse	7	3	3	Pulse Height(kV)	2.5~4.0	
Input Voltage At Lamp Dropout				Pulse Width (≥u S)	1us@ 2250V	
UL 1029 Bench Top Rise	A	A	A			
OCV(Min.)	110					
Input Power	130W					
Power Factor	≥90%					
Regulation	Line Volts	±5%				
	Lamp Watts	±10%				
Insulation System	Class H, 180°C					
Ballast Dimension	A	2.3"				
	B	3.7"				
Ballast Net Weight	7.3 lbs					
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C	

Ballast Dimension	Wiring Diagram
	
Ignitor	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.