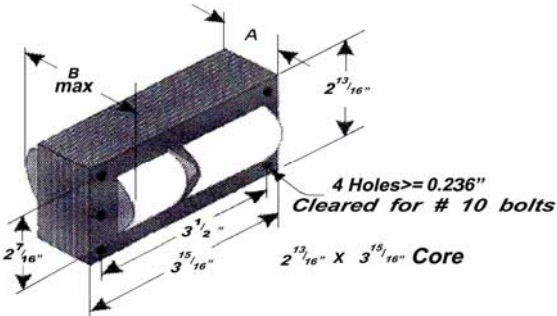
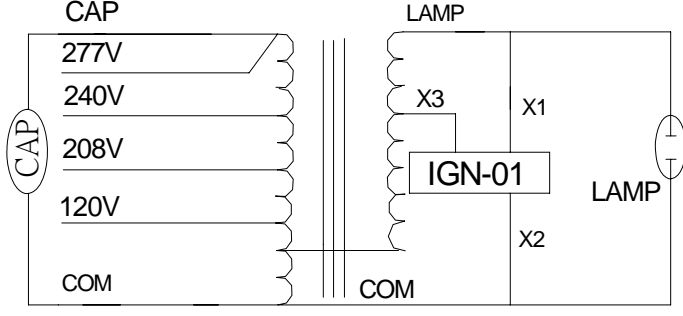
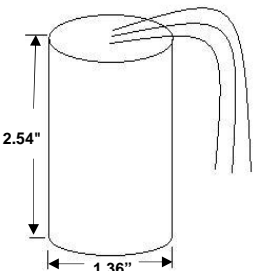
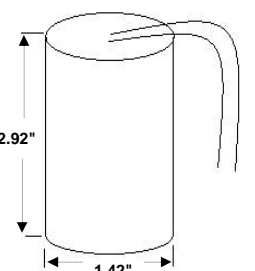


E-BAL-S100-AMT60N	
Ballast Type	<b>High Pressure Sodium</b>
Lamp	<b>100W S54</b>
Circuit Type	<b>HX-HPF</b>
Input Frequency	<b>60HZ</b>

Model No: E-BAL-S100-AMT60N		Capacitor (Required)					
Input Voltage	120	208	240	277	Capacitance	10uF±3%	
Operating Current	2.2	1.3	1.1	0.9	Minimum Volts	280V	
Open Circuit Current	2.7	1.5	1.3	1.0	Dry	Diameter	1.42"
Starting Current	3.1	3.1	3.1	3.1		Height	2.92"
CCF (*ANSI≤1.8)	1.8	1.8	1.8	1.8	Case Max. Temperature	100°C	
Short Circuit Current	Secondary	3.1	3.1	3.1		3.1	
	Input	1.2	0.7	0.6	0.5		
Recommended Fuse	7	5	3	3	Ignitor (Required)		
Input Voltage At Lamp Dropout					Ignitor Model	IGN-01	
UL 1029 Bench Top Rise	A	A	A	A	Pulse Height(kV)	2.5~4.0	
OCV(Min.)	110				Pulse Width (≥u S)	1us @ 2250V	
Input Power	130W						
Power Factor	≥90%						
Regulation	Line Volts	±5%					
	Lamp Watts	±10%					
Insulation System	Class H, 180°C						
Ballast Dimension	A	2.0"					
	B	3.4"					
Ballast Net Weight	6.2 lbs						
Leads	12"-Cross Link Polyolefin				Min.Starting Temp.	-20°F / -30°C	

Ballast Dimension	Wiring Diagram
	
<p><b>Ignitor</b></p> 	<p><b>Capacitor</b></p> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.