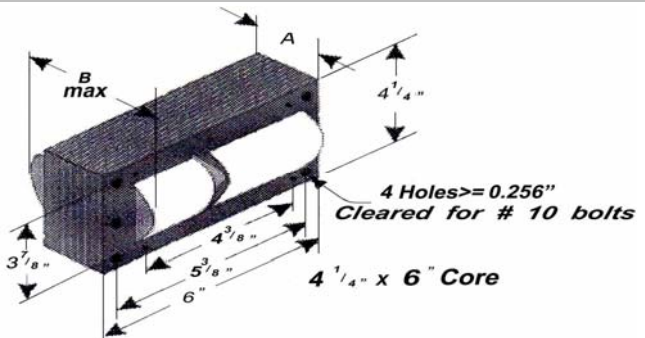
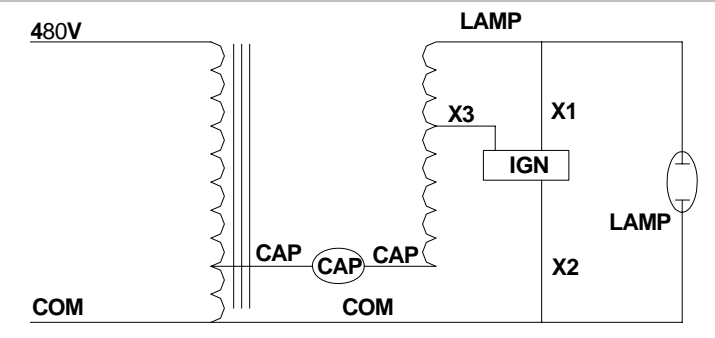
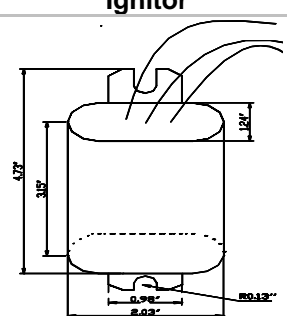
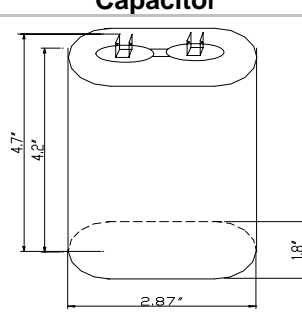


E-BAL-S1000-A4860N	
Ballast Type	High Pressure Sodium
Lamp	1000W S52
Circuit Type	CWA
Input Frequency	60HZ

Model_No:	E-BAL-S1000-A4860N			Capacitor (Required)		
Input Voltage	480V			Capacitance	26uF±3%	
Operating Current	2.3			Minimum Volts	525V	
Open Circuit Current	1.3			Dry	Diameter	2.87"
Starting Current	7.1				Height	4.7"
CCF (*ANSI≤1.8)	1.8			Case Max. Temperature		100°C
Short Circuit Current	Secondary	7.1		Ignitor (Required)		
	Input	3.1		Ignitor Model	IGN	
Recommended Fuse	6			Pulse Height(kV)	3.0~5.0	
Input Voltage At Lamp Dropout				Pulse Width (≥u S)	4us@ 2700V	
UL 1029 Bench Top Rise	C					
	OCV(Min.)	456				
	Input Power	1100W				
	Power Factor	≥90%				
Regulation	Line Volts	±10%				
	Lamp Watts	±10%				
Insulation System	Class H, 180°C					
Ballast Dimension	A	3.9"				
	B	5.8"				
Ballast Net Weight	26.8 lbs					
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C	

<p><b>Ballast Dimension</b></p> 	<p><b>Wiring Diagram</b></p> 
<p><b>Ignitor</b></p> 	<p><b>Capacitor</b></p> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.