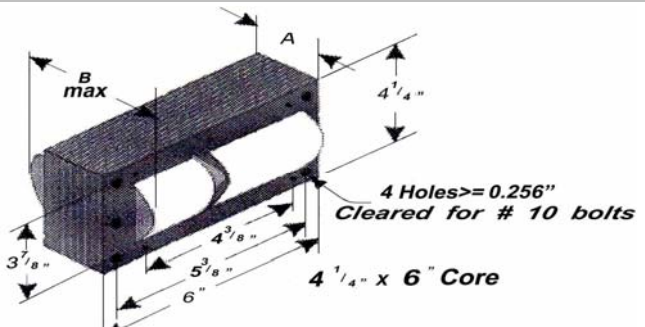
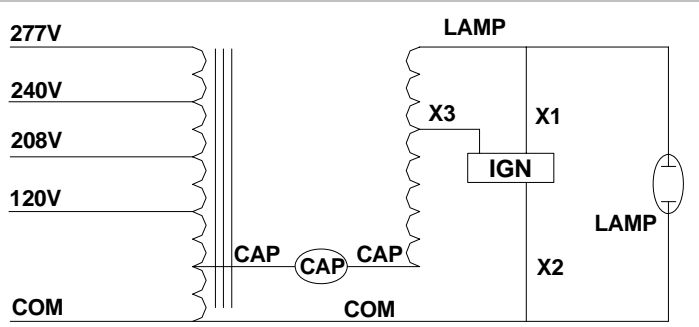
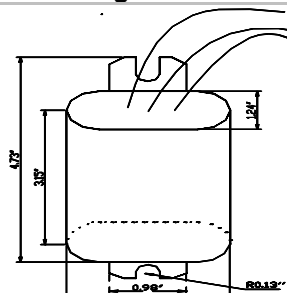
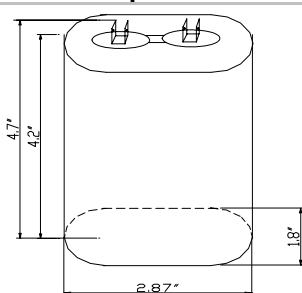


E-BAL-S1000-AMT60N	
Ballast Type	High Pressure Sodium
Lamp	1000W S52
Circuit Type	CWA
Input Frequency	60HZ

Model No:		E-BAL-S1000-AMT60N				Capacitor (Required)		
Input Voltage		120	208	240	277	Capacitance	26uF±3%	
Operating Current		9.5	5.5	4.8	4.2	Minimum Volts	525V	
Open Circuit Current		5.7	2.9	2.9	2.4	Dry	Diameter	2.87"
Starting Current		7.1	7.1	7.1	7.1		Height	4.7"
CCF (*ANSI≤1.8)		1.8	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	7.1	7.1	7.1	7.1	Ignitor (Required)		
	Input	8.4	5	4.2	3.7	Ignitor Model	IGN	
Recommended Fuse		25	15	10	10	Pulse Height(kV)	3.0~5.0	
Input Voltage At Lamp Dropout						Pulse Width (≥u S)	4us @ 2700V	
UL 1029 Bench Top Rise		B	D	E	B			
	OCV(Min.)	456						
	Input Power	1100W						
	Power Factor	≥90%						
Regulation	Line Volts	±10%						
	Lamp Watts	±10%						
Insulation System		Class H, 180°C						
Ballast Dimension	A	3.9"						
	B	6.1"						
Ballast Net Weight		27.8 lbs						
Leads		12"-Cross Link Polyolefin				Min.Starting Temp.	-20°F / -30°C	

<p>Ballast Dimension</p> 	<p>Wiring Diagram</p> 
<p>Ignitor</p> 	<p>Capacitor</p> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.