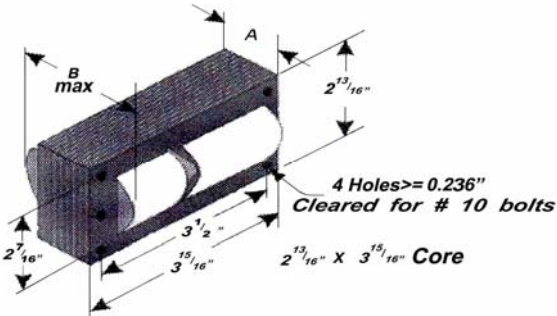
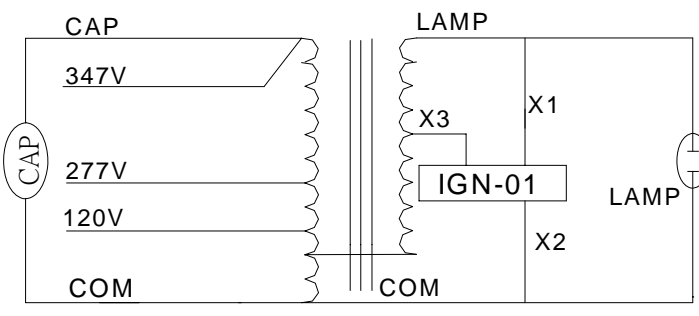
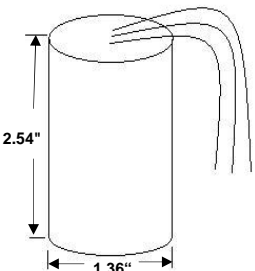
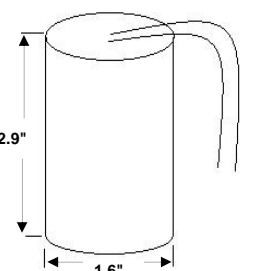


E-BAL-S150-A0360N	
Ballast Type	High Pressure Sodium
Lamp	150W S55
Circuit Type	HX-HPF
Input Frequency	60HZ

Model No: E-BAL-S150-A0360N				Capacitor (Required)				
Input Voltage	120	277	347	Capacitance	14uF±3%			
Operating Current	2.8	1.3	0.9	Minimum Volts	280V			
Open Circuit Current	3.5	1.5	0.6	Dry	Diameter	1.6"		
Starting Current	3.9	3.9	3.9		Height	2.9"		
CCF (*ANSI≤1.8)	1.8	1.8	1.8	Case Max. Temperature			100°C	
Short Circuit Current	Secondary	3.9	3.9	Ignitor (Required)				
	Input	3.3	1.1	1.6	Ignitor Model	IGN-01		
Recommended Fuse	10	4	3	Input Power	188W		Pulse Height(kV)	2.5~4.0
Input Voltage At Lamp Dropout				Power Factor	≥90%		Pulse Width (≥u S)	1us@ 2250V
UL 1029 Bench Top Rise		A	A	Regulation	Line Volts	±5%		
OCV(Min.)	110				Lamp Watts	±10%		
Input Power	188W			Insulation System	Class H, 180°C			
Power Factor	≥90%			Ballast Dimension	A	2.56"		
Regulation	Line Volts	±5%			B	3.86"		
	Lamp Watts	±10%		Ballast Net Weight	8.2 lbs			
Insulation System	Class H, 180°C			Leads	12"-Cross Link Polyolefin			
Ballast Dimension	A	2.56"		Min.Starting Temp.	-20°F / -30°C			
	B	3.86"						

Ballast Dimension	Wiring Diagram
	
Ignitor	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.