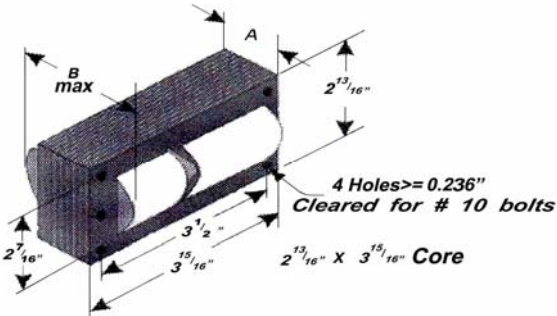
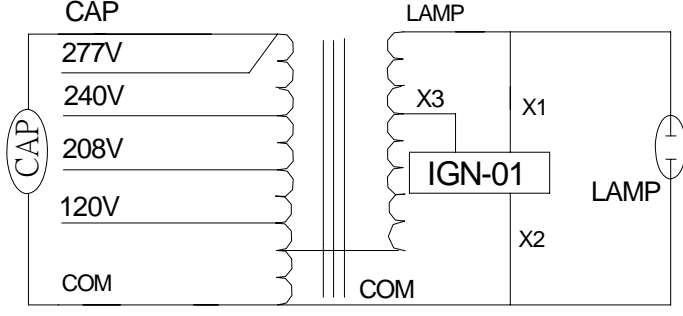
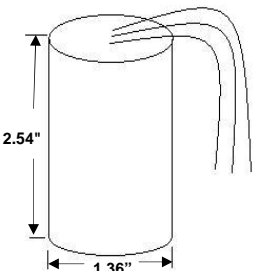
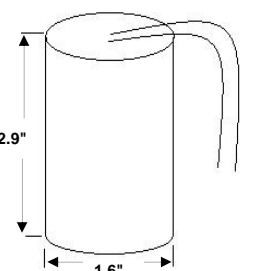


E-BAL-S150-AMT60N	
Ballast Type	High Pressure Sodium
Lamp	150W S55
Circuit Type	HX-HPF
Input Frequency	60HZ

Model No: E-BAL-S150-AMT60N					Capacitor (Required)		
Input Voltage	120	208	240	277	Capacitance	14uF±3%	
Operating Current	2.8	1.6	1.4	1.3	Minimum Volts	280V	
Open Circuit Current	3.5	1.6	1.7	1.5	Dry	Diameter	1.6"
Starting Current	3.9	3.9	3.9	3.9		Height	2.9"
CCF (*ANSI≤1.8)	1.8	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	3.9	3.9	3.9	Ignitor (Required)		
	Input	3.3	1.2	1.1	1	Ignitor Model	IGN-01
Recommended Fuse	10	5	5	5	Pulse Height(kV)	2.5~4.0	
Input Voltage At Lamp Dropout					Pulse Width (≥u S)	1us @ 2250V	
UL 1029 Bench Top Rise	A	A	B	A	Regulation		
OCV(Min.)	110	Insulation System		Class H, 180°C	Line Volts	±5%	
Input Power	188W	Ballast Dimension		A	Lamp Watts	±10%	
Power Factor	≥90%			B	Insulation System		
Regulation	Line Volts			A	Class H, 180°C		
	Lamp Watts			B	Ballast Dimension		
				A	2.56"		
				B	3.86"		
				Ballast Net Weight		7.6 lbs	
				Leads		12"-Cross Link Polyolefin	
				Min.Starting Temp.		-20°F / -30°C	

Ballast Dimension	Wiring Diagram
	
Ignitor	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.