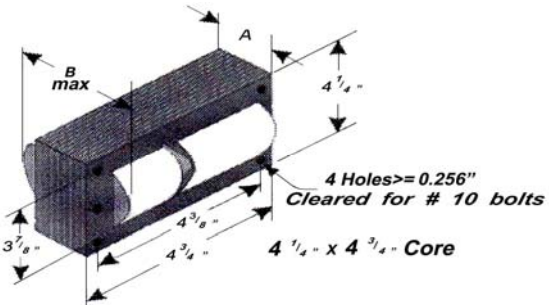
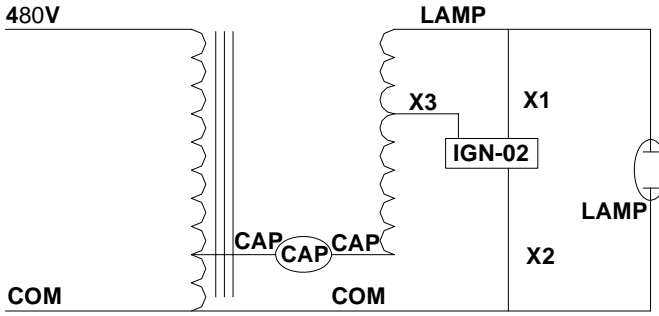
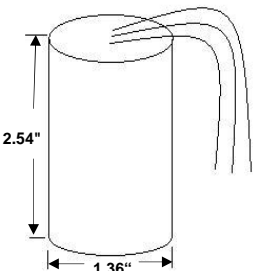
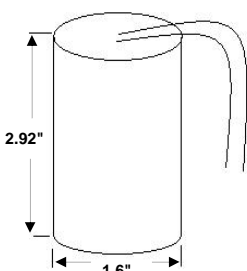


E-BAL-S250-A4860N	
Ballast Type	High Pressure Sodium
Lamp	250W S50
Circuit Type	CWA
Input Frequency	60HZ

Model No:	E-BAL-S250-A4860N			Capacitor (Required)			
Input Voltage	480V			Capacitance	35uF±3%		
Operating Current	0.7			Minimum Volts	240V		
Open Circuit Current	1.0			Dry	Diameter	1.6"	
Starting Current	4.2				Height	2.92"	
CCF (*ANSI≤1.8)	1.8			Case Max. Temperature			100°C
Short Circuit Current	Secondary	4.2		Ignitor (Required)			
	Input	0.9		Ignitor Model	IGN-02		
Recommended Fuse	2			Pulse Height(kV)	2.5~4.0		
Input Voltage At Lamp Dropout				Pulse Width (≥u S)	1us@ 2250V		
UL 1029 Bench Top Rise	B						
	OCV(Min.)	175					
	Input Power	310W					
	Power Factor	≥90%					
Regulation	Line Volts	±10%					
	Lamp Watts	±10%					
Insulation System	Class H, 180°C						
Ballast Dimension	A	1.82"					
	B	3.5"					
Ballast Net Weight	11.5 lbs						
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C		

Ballast Dimension	Wiring Diagram
	
Ignitor	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.