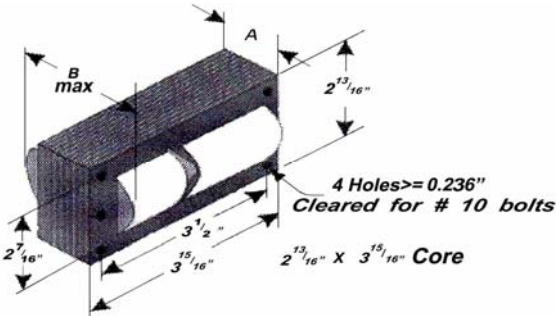
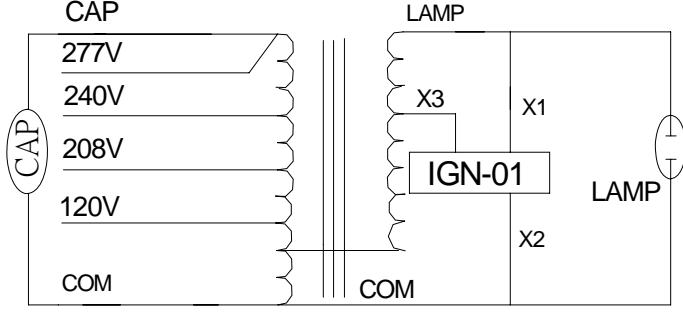
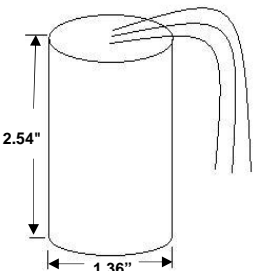
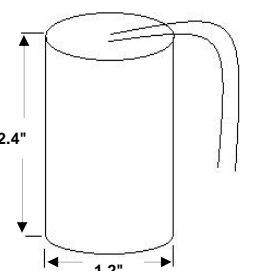


E-BAL-S50-AMT60N	
Ballast Type	<b>High Pressure Sodium</b>
Lamp	<b>50W S68</b>
Circuit Type	<b>HX-HPF</b>
Input Frequency	<b>60HZ</b>

Model No:	E-BAL-S50-AMT60N				Capacitor (Required)			
Input Voltage	120	208	240	277	Capacitance	5uF±3%		
Operating Current	0.55	0.33	0.30	0.26	Minimum Volts	300V		
Open Circuit Current	1.02	0.58	0.51	0.44	Dry	Diameter	1.2"	
Starting Current	1.5	1.5	1.5	1.5		Height	2.4"	
CCF (*ANSI≤1.8)	1.8	1.8	1.8	1.8	Case Max. Temperature		100°C	
Short Circuit Current	Secondary	1.5	1.5	1.5	Ignitor (Required)			
	Input	0.54	0.31	0.27	0.23	Ignitor Model	IGN-01	
Recommended Fuse	5	3	2	1	Pulse Height(kV)	2.5~4.0		
Input Voltage At Lamp Dropout					Pulse Width (≥u S)	1us @ 2250V		
UL 1029 Bench Top Rise	A	A	A	A				
OCV(Min.)	110V							
Input Power	66W							
Power Factor	≥90%							
Regulation	Line Volts	±5%						
	Lamp Watts	±10%						
Insulation System	Class H, 180°C							
Ballast Dimension	A	1.3"						
	B	2.8"						
Ballast Net Weight	4.4 lbs							
Leads	12"-Cross Link Polyolefin				Min.Starting Temp.	-20°F / -30°C		

<h3>Ballast Dimension</h3> 	<h3>Wiring Diagram</h3> 
<h3>Ignitor</h3> 	<h3>Capacitor</h3> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.