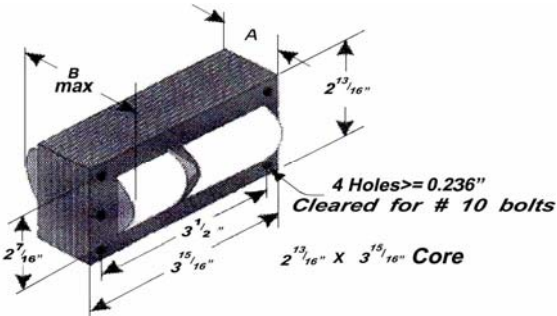
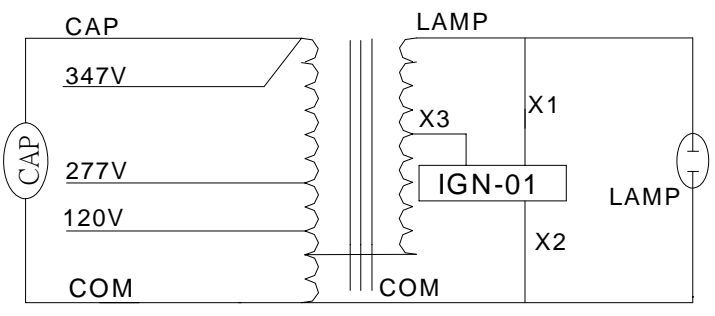
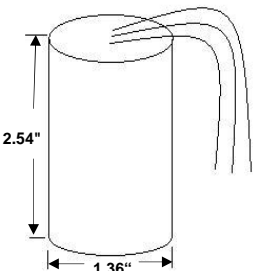
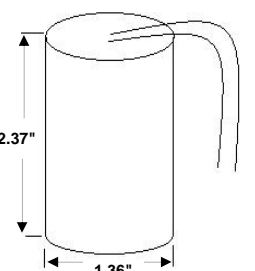


E-BAL-S70-A0360N	
Ballast Type	<b>High Pressure Sodium</b>
Lamp	<b>70W S62</b>
Circuit Type	<b>HX-HPF</b>
Input Frequency	<b>60HZ</b>

Model_No:	E-BAL-S70-A0360N			Capacitor (Required)			
Input Voltage	120	277	347	Capacitance	8uF±3%		
Operating Current	1.4	0.7	0.6	Minimum Volts	300V		
Open Circuit Current	0.3	0.3	0.3	Dry	Diameter	1.36"	
Starting Current	1.6	1.6	1.6		Height	2.37"	
CCF (*ANSI≤1.8)	1.8	1.8	1.8	Case Max. Temperature			100°C
Short Circuit Current	Secondary	1.6	1.6	Ignitor (Required)			
	Input	2.7	2.0	1.96	Ignitor Model	IGN-01	
Recommended Fuse	5	2	2	Pulse Height(kV)	2.5~4.0		
Input Voltage At Lamp Dropout				Pulse Width (≥u S)	1us@ 2250V		
UL 1029 Bench Top Rise		A	A	Regulation			
OCV(Min.)	110			Line Volts	±5%		
Input Power	93W			Lamp Watts	±10%		
Power Factor	≥90%			Insulation System			Class H, 180°C
Regulation				Ballast Dimension			
				A	1.5"		
			B	3.2"			
			Ballast Net Weight			5.4 lbs	
			Leads			12"-Cross Link Polyolefin	
						Min.Starting Temp.	-20°F / -30°C

<h3>Ballast Dimension</h3> 	<h3>Wiring Diagram</h3> 
<h3>Ignitor</h3> 	<h3>Capacitor</h3> 

When Ordering, add suffix for options:  
 D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.