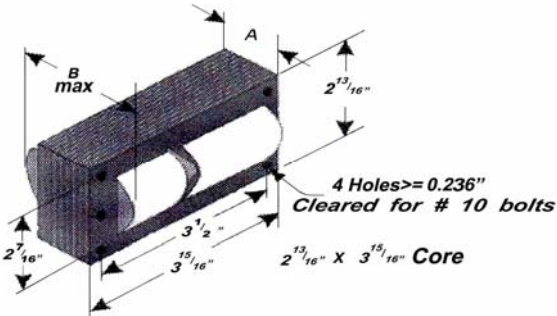
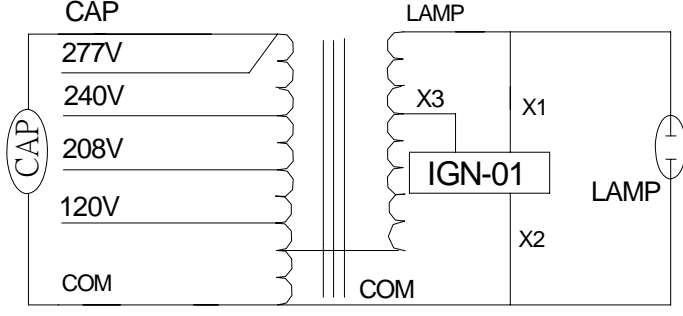
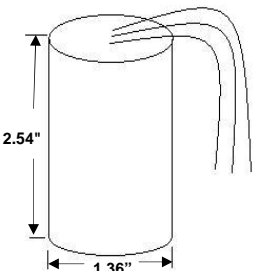
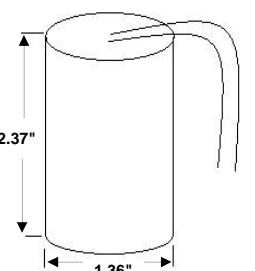


E-BAL-S70-AMT60N	
Ballast Type	High Pressure Sodium
Lamp	70W S62
Circuit Type	HX-HPF
Input Frequency	60HZ

Model No: E-BAL-S70-AMT60N		Capacitor (Required)					
Input Voltage	120	208	240	277	Capacitance	8uF±3%	
Operating Current	1.4	0.9	0.8	0.7	Minimum Volts	300V	
Open Circuit Current	0.3	0.2	0.23	0.3	Dry	Diameter	1.36"
Starting Current	1.6	1.6	1.6	1.6		Height	2.37"
CCF (*ANSI≤1.8)	1.8	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	1.6	1.6	1.6	Ignitor (Required)		
	Input	2.7	1.6	1.6	2.0	Ignitor Model	IGN-01
Recommended Fuse	5	3	2	2	Pulse Height(kV)	2.5~4.0	
Input Voltage At Lamp Dropout					Pulse Width (≥u S)	1us @ 2250V	
UL 1029 Bench Top Rise	A	A	A	A	Regulation		
OCV(Min.)	110V				Line Volts	±5%	
Input Power	91W				Lamp Watts	±10%	
Power Factor	≥90%				Insulation System		
Regulation	Class H, 180°C				Ballast Dimension		
	A				1.5"	B	
B				3.2"	Ballast Net Weight		
5.3 lbs				Leads			
12"-Cross Link Polyolefin				Min.Starting Temp.			
				-20°F / -30°C			

Ballast Dimension	Wiring Diagram
	
Ignitor	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.