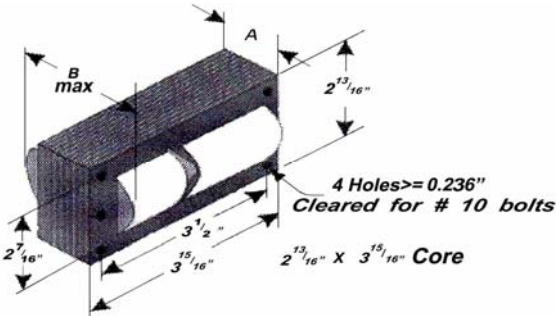
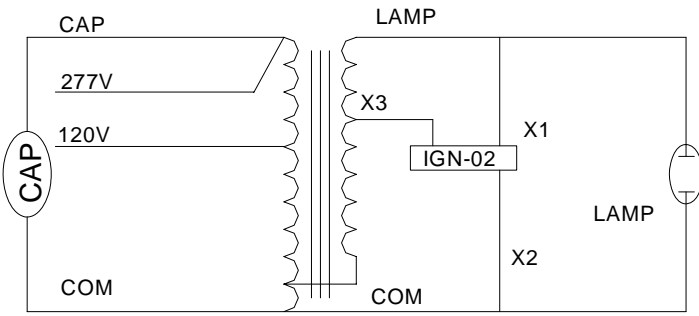
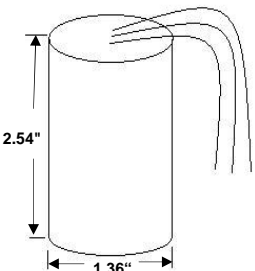
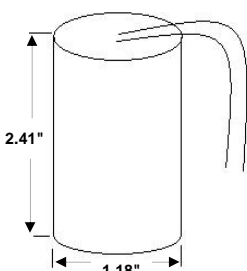


E-BAL-H005D	
Ballast Type	Metal Halide
Lamp	50W M110
Circuit Type	HX-HPF
Input Frequency	60HZ

Model No: E-BAL-H005D				Capacitor (Required)		
Input Voltage	120	277		Capacitance	6uF±3%	
Operating Current	1.0	0.5		Minimum Volts	280V	
Open Circuit Current	0.5	0.4		Dry	Diameter	1.18"
Starting Current	0.68	0.68			Height	2.41"
CCF (*ANSI≤1.8)	1.8	1.8				
Short Circuit Current	Secondary	0.68	0.68			
	Input	2.38	1.6			
Recommended Fuse	3	2		Case Max. Temperature	100°C	
Input Voltage At Lamp Dropout						
UL 1029 Bench Top Rise	A	A				
	OCV(Min.)	235		Ignitor (Required)		
	Input Power	72W		Ignitor Model	IGN-02	
	Power Factor	≥90%		Pulse Height(kV)	3.0~4.0	
Regulation	Line Volts	±5%		Pulse Width (≥u S)	1.0 @ 2.7	
	Lamp Watts	±10%				
Insulation System	Class H, 180°C					
Ballast Dimension	A	1.1"				
	B	2.3"				
Ballast Net Weight	3.6 lbs					
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C	

Ballast Dimension	Wiring Diagram
	
Ignitor	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.