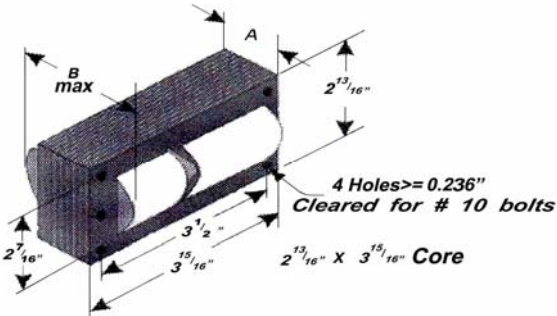
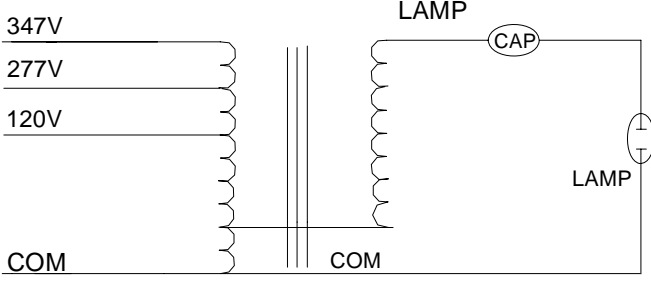
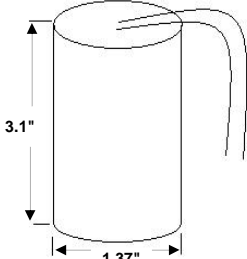


| E-BAL-HO17M3 | |
|-----------------|---------------------|
| Ballast Type | Metal Halide |
| Lamp | 175W M57 |
| Circuit Type | CWA |
| Input Frequency | 60HZ |

| Model_No: E-BAL-HO17M3 | | | | | Capacitor (Required) | | |
|-------------------------------|---------------------------|-------|-----|------------------------|----------------------|---------|-------|
| Input Voltage | 120 | 277 | 347 | Capacitance | | 10uF±3% | |
| Operating Current | 1.8 | 0.8 | 0.7 | Minimum Volts | | 400V | |
| Open Circuit Current | 2.2 | 1.3 | 1.1 | Dry | Diameter | 1.37" | |
| Starting Current | 1.9 | 1.9 | 1.9 | | Height | 3.1" | |
| CCF (*ANSI≤1.8) | 1.8 | 1.8 | 1.8 | Case Max. Temperature | | | 100°C |
| Short Circuit Current | Secondary | 1.9 | 1.9 | Ignitor (Not Required) | | | |
| | Input | 1.3 | 0.5 | 0.5 | Ignitor Model | | |
| Recommended Fuse | 5 | 2 | 2 | Pulse Height(kV) | | | |
| Input Voltage At Lamp Dropout | | | | Pulse Width (≥u S) | | | |
| UL 1029 Bench Top Rise | | C | D | | | | |
| OCV(Min.) | 275 | | | | | | |
| Input Power | 210W | | | | | | |
| Power Factor | ≥90% | | | | | | |
| Regulation | Line Volts | ±10% | | | | | |
| | Lamp Watts | ±10% | | | | | |
| Insulation System | Class H, 180°C | | | | | | |
| Ballast Dimension | A | 2.4" | | | | | |
| | B | 3.07" | | | | | |
| Ballast Net Weight | 7.0 lbs | | | | | | |
| Leads | 12"-Cross Link Polyolefin | | | Min.Starting Temp. | -20°F / -30°C | | |

| Ballast Dimension | Wiring Diagram |
|--|---|
|  |  |
| | Capacitor |
| |  |

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.