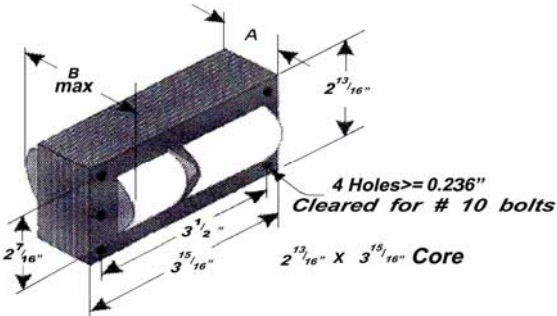
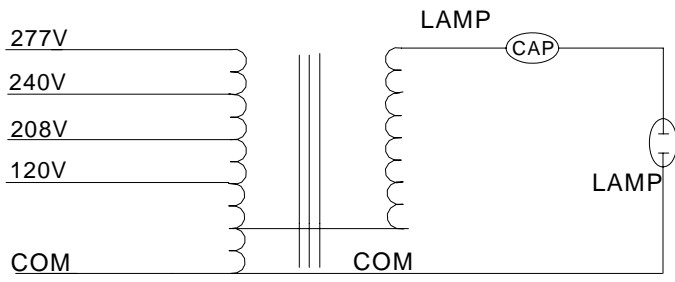
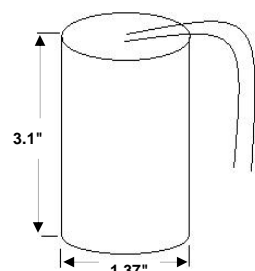


E-BAL-HO17M4	
Ballast Type	<b>Metal Halide</b>
Lamp	<b>175W M57</b>
Circuit Type	<b>CWA</b>
Input Frequency	<b>60HZ</b>

Model No: E-BAL-HO17M4						Capacitor (Required)		
Input Voltage		120	208	240	277	Capacitance	10uF±3%	
Operating Current		1.8	1.1	0.9	0.8	Minimum Volts	400V	
Open Circuit Current		2.2	1.3	1.1	1.0	Dry	Diameter	1.37"
Starting Current		1.9	1.9	1.9	1.9		Height	3.1"
CCF (*ANSI≤1.8)		1.8	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	1.9	1.9	1.9	1.9	Ignitor (Not Required)		
	Input	1.3	0.7	0.6	0.5	Ignitor Model		
Recommended Fuse		5	3	3	2	Pulse Height(kV)		
Input Voltage At Lamp Dropout						Pulse Width (≥ u S)		
UL 1029 Bench Top Rise		C	D	D	D			
	OCV(Min.)	275						
	Input Power	210W						
	Power Factor	≥90%						
Regulation	Line Volts	±10%						
	Lamp Watts	±10%						
Insulation System		Class H, 180°C						
Ballast Dimension	A	2.4"						
	B	3.7"						
Ballast Net Weight		6.8 lbs						
Leads		12"-Cross Link Polyolefin				Min.Starting Temp.	-20°F / -30°C	

Ballast Dimension	Wiring Diagram
	
	<p><b>Capacitor</b></p> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.