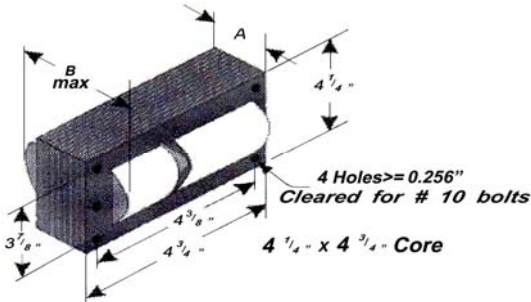
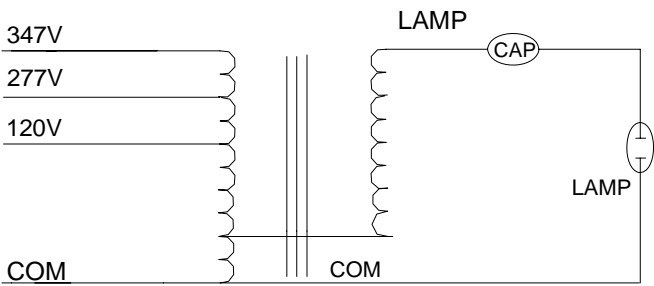
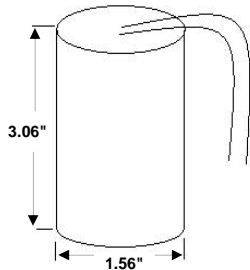


E-BAL-HO25M3	
Ballast Type	Metal Halide
Lamp	250W M58
Circuit Type	CWA
Input Frequency	60HZ

Model_No: E-BAL-HO25M3					Capacitor (Required)		
Input Voltage	120	277	347	Capacitance		15uF±3%	
Operating Current	2.5	1.1	0.9	Minimum Volts		400V	
Open Circuit Current	2.1	1.9	1.8	Dry	Diameter	1.56"	
Starting Current	2.5	2.5	2.5		Height	3.06"	
CCF (*ANSI≤1.8)	1.8	1.8	1.8	Case Max. Temperature			100°C
Short Circuit Current	Secondary	2.5	2.5	Ignitor (Not Required)			
	Input	2.7	1.2	1.1	Ignitor Model		
Recommended Fuse	8	3	3	Pulse Height(kV)			
Input Voltage At Lamp Dropout				Pulse Width (≥u S)			
UL 1029 Bench Top Rise	A	A	A				
OCV(Min.)	270						
Input Power	295W						
Power Factor	≥90%						
Regulation	Line Volts	±10%					
	Lamp Watts	±10%					
Insulation System	Class H, 180°C						
Ballast Dimension	A	1.5"					
	B	3.31"					
Ballast Net Weight	8.1lbs						
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C		

Ballast Dimension	Wiring Diagram
	
	<p>Capacitor</p> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.