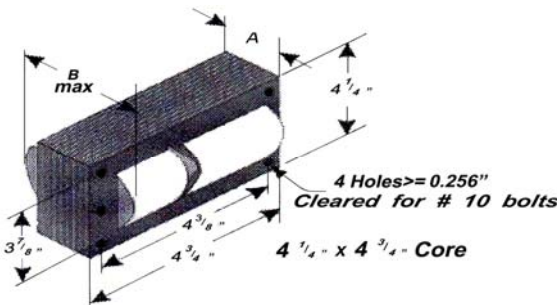
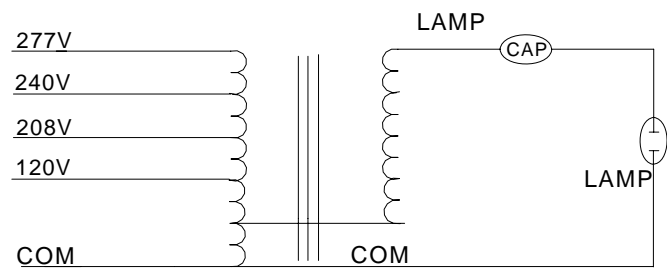
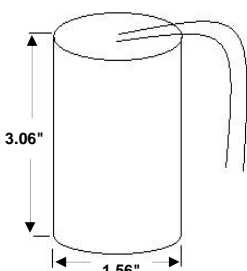


| E-BAL-HO25M4 | |
|-----------------|---------------------|
| Ballast Type | Metal Halide |
| Lamp | 250W M58 |
| Circuit Type | CWA |
| Input Frequency | 60HZ |

| Model No: E-BAL-HO25M4 | | | | | | Capacitor (Required) | | |
|-------------------------------|--------------|---------------------------|-----|-----|-----|------------------------|---------------|-------|
| Input Voltage | | 120 | 208 | 240 | 277 | Capacitance | 15uF±3% | |
| Operating Current | | 2.5 | 1.4 | 1.3 | 1.1 | Minimum Volts | 400V | |
| Open Circuit Current | | 2.1 | 1.2 | 1.0 | 0.9 | Dry | Diameter | 1.56" |
| Starting Current | | 2.5 | 2.5 | 2.5 | 2.5 | | Height | 3.06" |
| CCF (*ANSI≤1.8) | | 1.8 | 1.8 | 1.8 | 1.8 | Case Max. Temperature | | 100°C |
| Short Circuit Current | Secondary | 2.5 | 2.5 | 2.5 | 2.5 | Ignitor (Not Required) | | |
| | Input | 2.7 | 1.7 | 1.4 | 1.2 | Ignitor Model | | |
| Recommended Fuse | | 8 | 5 | 5 | 3 | Pulse Height(kV) | | |
| Input Voltage At Lamp Dropout | | | | | | Pulse Width (≥u S) | | |
| UL 1029 Bench Top Rise | | A | A | B | A | | | |
| | OCV(Min.) | 270 | | | | | | |
| | Input Power | 295W | | | | | | |
| | Power Factor | ≥90% | | | | | | |
| Regulation | Line Volts | ±10% | | | | | | |
| | Lamp Watts | ±10% | | | | | | |
| Insulation System | | Class H, 180°C | | | | | | |
| Ballast Dimension | A | 1.5" | | | | | | |
| | B | 3.47" | | | | | | |
| Ballast Net Weight | | 8.1lbs | | | | | | |
| Leads | | 12"-Cross Link Polyolefin | | | | Min.Starting Temp. | -20°F / -30°C | |

| Ballast Dimension | Wiring Diagram |
|---|---|
|  |  |
| | Capacitor |
| |  |

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.