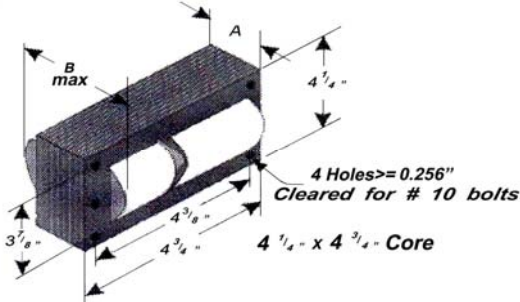
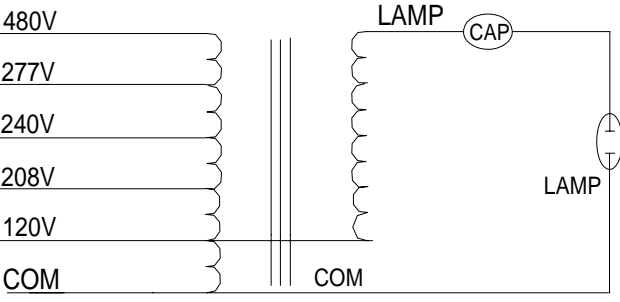
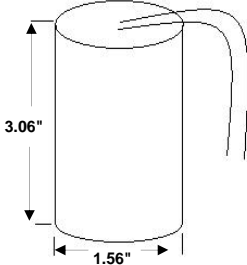


E-BAL-H025M5	
Ballast Type	Metal Halide
Lamp	250W M58
Circuit Type	CWA
Input Frequency	60HZ

Model_No: E-BAL-H025M5							Capacitor (Required)		
Input Voltage		120	208	240	277	480	Capacitance	15uF±3%	
Operating Current		2.6	1.5	1.4	1.1	0.7	Minimum Volts	400V	
Open Circuit Current		1.8	1.1	1.0	0.8	0.5	Dry	Diameter	1.56"
Starting Current		2.4	2.4	2.4	2.4	2.4		Height	3.06"
CCF (*ANSI≤1.8)		1.8	1.8	1.8	1.8	1.8			
Short Circuit Current	Secondary	2.8	2.8	2.8	2.8	2.8			
	Input	2.0	1.2	1.0	0.9	0.6			
Recommended Fuse		8	5	5	3	2	Case Max.Temperature	100°C	
Input Voltage At Lamp Dropout									
UL 1029 Bench Top Rise		A	A	B	A	B			
OCV(Min.)		270					Ignitor (Not Required)		
Input Power		290W					Ignitor Model		
Power Factor		≥90%					Pulse Height(KV)		
Regulation	Line Volts	±10%					Pulse Width (≥u S)		
	Lamp Watts	±10%							
Insulation System		Class H, 180°C							
Ballast Dimension	A	1.6"							
	B	3.1"							
Ballast Net Weight		10.0 lbs							
Leads		12"-Cross Link Polyolefin					Min.Starting Temp.	-20°F / -30°C	

Ballast Dimension	Wiring Diagram
	
	<p>Capacitor</p> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.

IPP International Power Product

515 S.Yorbita Road
City of Industry, CA 91744
Toll Free: 1-888-539-5586