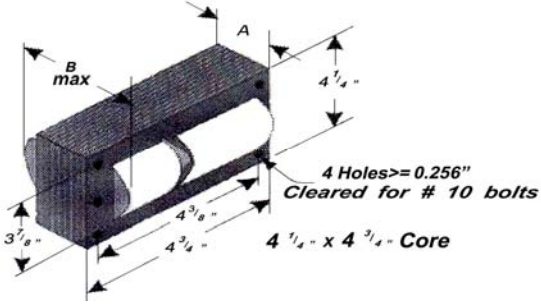
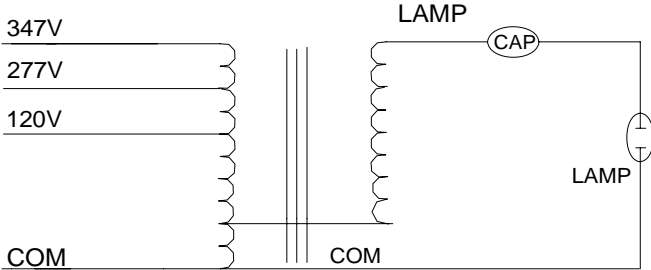
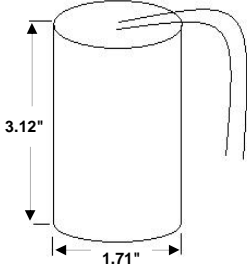


E-BAL-H040M3	
Ballast Type	Metal Halide
Lamp	400W M59
Circuit Type	CWA
Input Frequency	60HZ

Model No: E-BAL-H040M3					Capacitor (Required)		
Input Voltage	120	277	347	Capacitance		24uF±3%	
Operating Current	4.0	1.7	1.4	Minimum Volts		400V	
Open Circuit Current	3.6	1.6	1.4	Dry	Diameter	1.71"	
Starting Current	4.0	4.0	4.0		Height	3.12"	
CCF (*ANSI≤1.8)	1.8	1.8	1.8	Case Max. Temperature			100°C
Short Circuit Current	Secondary	4.0	4.0	Ignitor (Not Required)			
	Input	4.2	1.8	1.75	Ignitor Model		
Recommended Fuse	10	5	4	Pulse Height(kV)			
Input Voltage At Lamp Dropout				Pulse Width (≥u S)			
UL 1029 Bench Top Rise	D	D	D				
OCV(Min.)	225V						
Input Power	460W						
Power Factor	≥90%						
Regulation	Line Volts	±10%					
	Lamp Watts	±10%					
Insulation System	Class H, 180°C						
Ballast Dimension	A	2.33"					
	B	4.1"					
Ballast Net Weight	11.3 lbs						
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.		-20°F / -30°C	

Ballast Dimension	Wiring Diagram
	
	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.

IPP International Power Product
515 S.Yorbita Road
City of Industry, CA 91744
Toll Free: 1-888-539-5586