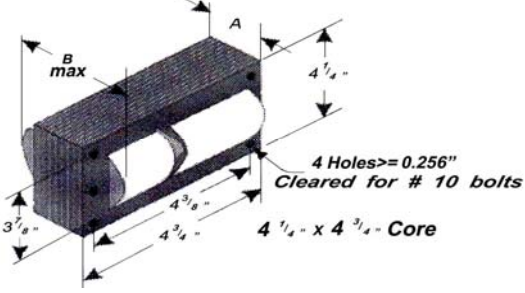
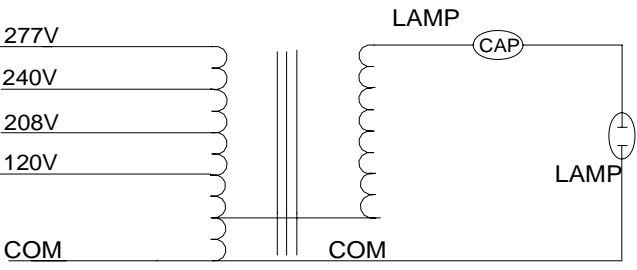
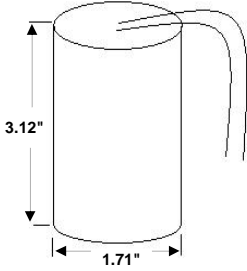


E-BAL-H040M4	
Ballast Type	Metal Halide
Lamp	400W M59
Circuit Type	CWA
Input Frequency	60HZ

Model No: E-BAL-H040M4						Capacitor (Required)		
Input Voltage		120	208	240	277	Capacitance	24uF±3%	
Operating Current		4	2.3	2.0	1.7	Minimum Volts	400V	
Open Circuit Current		3.6	2.1	1.8	1.6	Dry	Diameter	1.71"
Starting Current		4.0	4.0	4.0	4.0		Height	3.12"
CCF (*ANSI≤1.8)		1.8	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	4.0	4.0	4.0	4.0	Ignitor (Not Required)		
	Input	4.2	2.4	2.1	1.8	Ignitor Model		
Recommended Fuse		10	7	5	5	Pulse Height(kV)		
Input Voltage At Lamp Dropout						Pulse Width (≥ u S)		
UL 1029 Bench Top Rise		D	E	D	E			
	OCV(Min.)	225						
	Input Power	458W						
	Power Factor	≥90%						
Regulation	Line Volts	±10%						
	Lamp Watts	±10%						
Insulation System		Class H, 180°C						
Ballast Dimension	A	2.33"						
	B	3.9"						
Ballast Net Weight		11.9 lbs						
Leads		12"-Cross Link Polyolefin				Min.Starting Temp.	-20°F / -30°C	

Ballast Dimension	Wiring Diagram
	
	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.