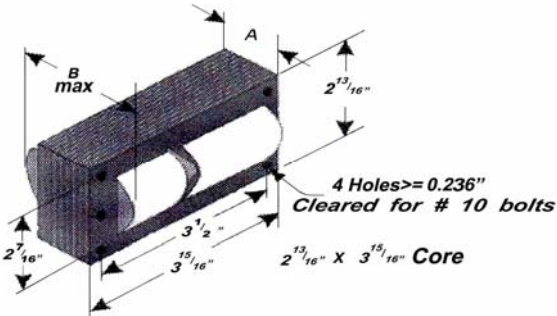
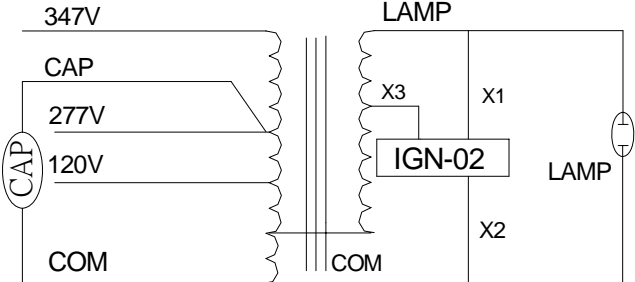
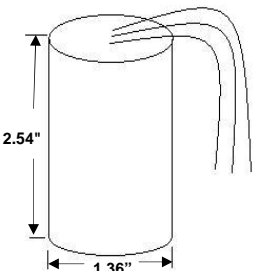
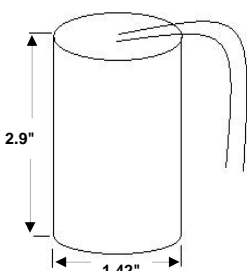


E-BAL-H100-A0360N	
Ballast Type	Metal Halide
Lamp	100W M90
Circuit Type	HX-HPF
Input Frequency	60HZ

Model_No: E-BAL-H100-A0360N		Capacitor (Required)		
Input Voltage	120 277 347	Capacitance	12uF±3%	
Operating Current	2.6 1.2 1.0	Minimum Volts	280V	
Open Circuit Current	2.7 1.2 1.0	Dry	Diameter	1.42"
Starting Current	1.5 1.5 1.5		Height	2.9"
CCF (*ANSI≤1.8)	1.8 1.8 1.8	Case Max. Temperature	100°C	
Short Circuit Current	Secondary	1.5 1.5 1.5	Ignitor (Required)	
	Input	1.5 0.7 0.6	Ignitor Model	IGN-02
Recommended Fuse	6 3 2	Pulse Height(kV)	3.0~4.0	
Input Voltage At Lamp Dropout		Pulse Width (≥u S)	1.0 @ 2.7	
UL 1029 Bench Top Rise	B B B			
OCV(Min.)	235V			
Input Power	129W			
Power Factor	≥90%			
Regulation	Line Volts	±5%		
	Lamp Watts	±10%		
Insulation System	Class H, 180°C			
Ballast Dimension	A	1.7"		
	B	3.0"		
Ballast Net Weight	5.8 lbs			
Leads	12"-Cross Link Polyolefin	Min.Starting Temp.	-20°F / -30°C	

<h3>Ballast Dimension</h3> 	<h3>Wiring Diagram</h3> 
<h3>Ignitor</h3> 	<h3>Capacitor</h3> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.