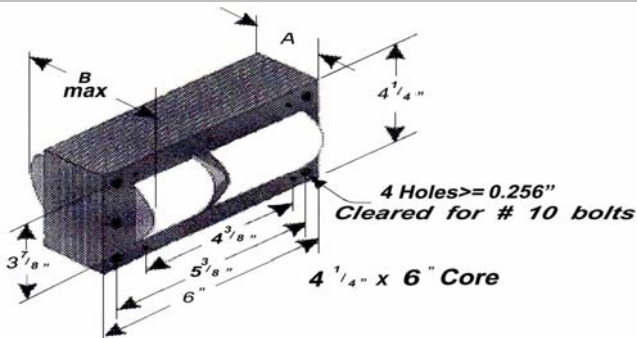
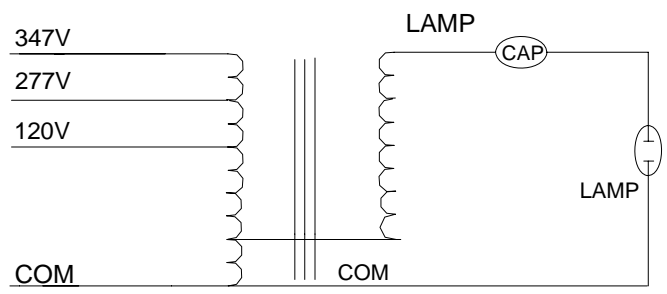
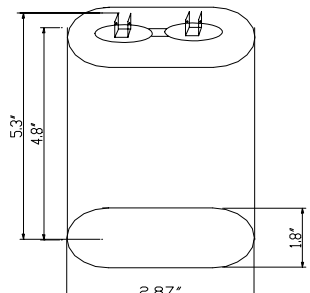


E-BAL-H1000-A0360N	
Ballast Type	<b>Metal Halide</b>
Lamp	<b>1000W M47</b>
Circuit Type	<b>CWA</b>
Input Frequency	<b>60HZ</b>

Model_No:	E-BAL-H1000-A0360N			Capacitor (Required)		
Input Voltage	120	277	347	Capacitance	24uF±3%	
Operating Current	9.0	3.9	3.2	Minimum Volts	480V	
Open Circuit Current	5.6	2.5	2.3	Dry	Diameter	2.87"
Starting Current	5.7	5.7	5.7		Height	5.3"
CCF (*ANSI≤1.8)	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	5.7	5.7	Ignitor (Not Required)		
	Input	8.5	3.6	3.5	Ignitor Model	
Recommended Fuse	20	10	8	Pulse Height(kV)		
Input Voltage At Lamp Dropout				Pulse Width (≥u S)		
UL 1029 Bench Top Rise	D	C	C			
OCV(Min.)	440					
Input Power	1080W					
Power Factor	≥90%					
Regulation	Line Volts	±10%				
	Lamp Watts	±10%				
Insulation System	Class H, 180°C					
Ballast Dimension	A	2.84"				
	B	4.88"				
Ballast Net Weight	17.8 lbs					
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C	

<p><b>Ballast Dimension</b></p> 	<p><b>Wiring Diagram</b></p> 
	<p><b>Capacitor</b></p> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.