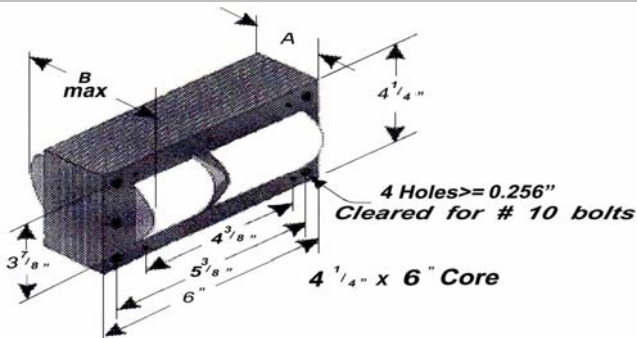
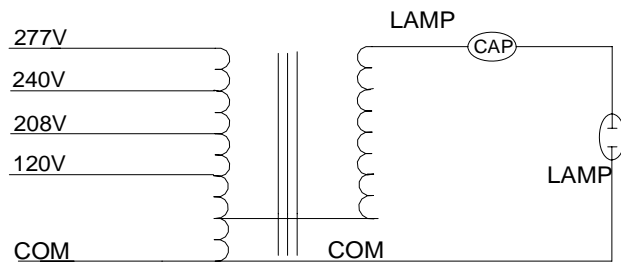
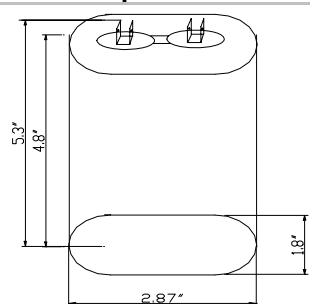


E-BAL-H1000-AMT60N	
Ballast Type	Metal Halide
Lamp	1000W M47
Circuit Type	CWA
Input Frequency	60HZ

Model No: E-BAL-H1000-AMT60N		Capacitor (Required)					
Input Voltage	120	208	240	277	Capacitance	24uF±3%	
Operating Current	9.0	5.2	4.5	3.9	Minimum Volts	480V	
Open Circuit Current	5.6	3.3	2.8	2.5	Dry	Diameter	2.87"
Starting Current	5.7	5.7	5.7	5.7		Height	5.3"
CCF (*ANSI≤1.8)	1.8	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	5.7	5.7	5.7	Ignitor (Not Required)		
	Input	8.5	4.8	4.3	3.6	Ignitor Model	
Recommended Fuse	20	15	10	10	Pulse Height(kV)		
Input Voltage At Lamp Dropout					Pulse Width (≥u S)		
UL 1029 Bench Top Rise	D	B	B	B			
OCV(Min.)	440						
Input Power	1080W						
Power Factor	≥90%						
Regulation	Line Volts	±10%					
	Lamp Watts	±10%					
Insulation System	Class H, 180°C						
Ballast Dimension	A	2.84"					
	B	4.81"					
Ballast Net Weight	17.8 lbs						
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.			-20°F / -30°C

Ballast Dimension	Wiring Diagram
 <p>Ballast Dimension</p> <p>4 1/4" x 6" Core</p> <p>4 Holes ≥ 0.256" Cleared for # 10 bolts</p>	 <p>Wiring Diagram</p> <p>277V 240V 208V 120V COM</p> <p>LAMP CAP LAMP</p>
	 <p>Capacitor</p> <p>5.3" 4.8" 2.87" 1.8"</p>

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.