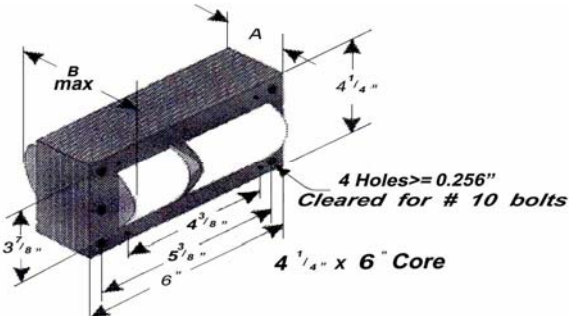
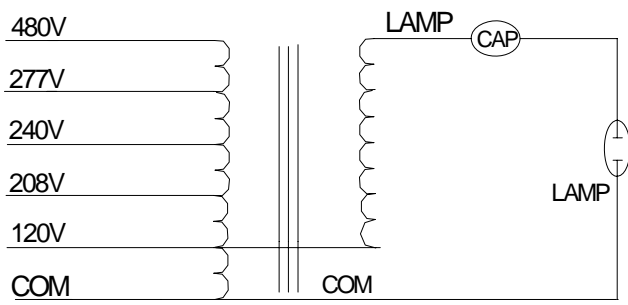
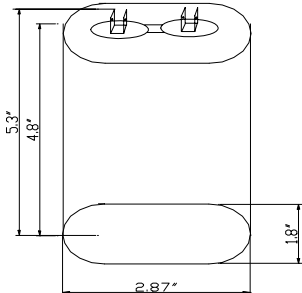


E-BAL-H1000M5	
Ballast Type	<b>Metal Halide</b>
Lamp	<b>1000W M47</b>
Circuit Type	<b>CWA</b>
Input Frequency	<b>60HZ</b>

Model_No: E-BAL-H1000M5							Capacitor (Required)		
Input Voltage	120	208	240	277	480	Capacitance	24uF±3%		
Operating Current	9.0	5.6	4.7	4.1	2.4	Minimum Volts	480V		
Open Circuit Current	6.5	3.7	3.2	2.8	1.6	Dry	Diameter	2.87"	
Starting Current	6.0	6.0	6.0	6.0	6.0		Height	5.3"	
CCF (*ANSI≤1.8)	1.8	1.8	1.8	1.8	1.8	Case Max. Temperature	100°C		
Short Circuit Current	Secondary	5.6	5.6	5.6	5.6				
	Input	6.0	3.5	3.0	2.6	1.5			
Recommended Fuse	22	15	12	10	6				
Input Voltage At Lamp Dropout									
UL 1029 Bench Top Rise		D	D	C	C				
OCV(Min.)	440					Ignitor (Not Required)			
Input Power	1080 W					Ignitor Model			
Power Factor	≥ 90%					Pulse Height(KV)			
Regulation	Line Volts	±10%					Pulse Width (≥ u S)		
	Lamp Watts	±10%							
Insulation System	Class H, 180°C								
Ballast Dimension	A	3.0"							
	B	4.7"							
Ballast Net Weight	21.0 lbs								
Leads	12"-Cross Link Polyolefin					Min.Starting Temp.	-20°F / -30°C		

Ballast Dimension	Wiring Diagram
 <p><b>Ballast Dimension</b></p> <p>4 1/4" x 6" Core</p> <p>4 Holes &gt;= 0.256" Cleared for # 10 bolts</p>	 <p><b>Wiring Diagram</b></p> <p>480V 277V 240V 208V 120V COM</p> <p>LAMP CAP LAMP COM</p>
	 <p><b>Capacitor</b></p> <p>5.3" 4.8" 2.87" 1.8"</p>

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.