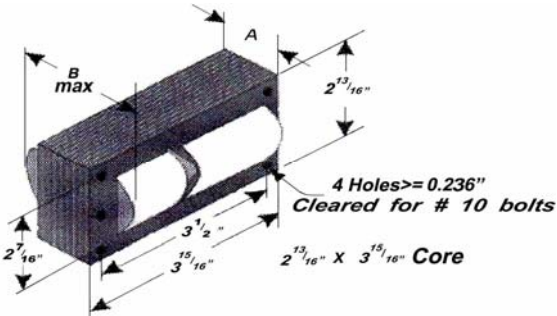
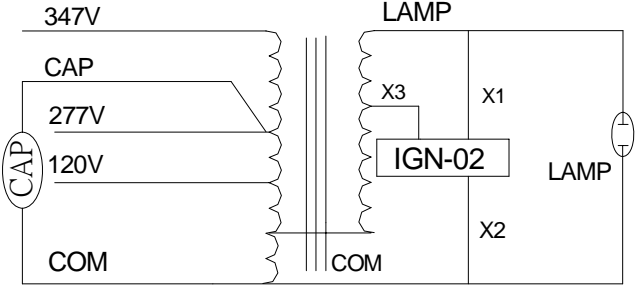
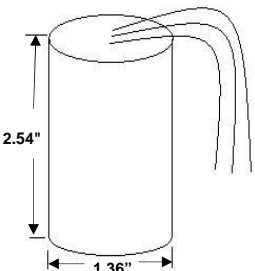
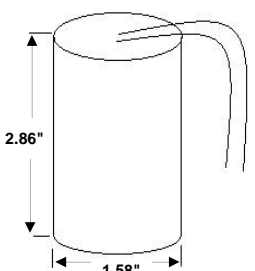


E-BAL-H150-A0360N	
Ballast Type	<b>Metal Halide</b>
Lamp	<b>150W M102</b>
Circuit Type	<b>HX-HPF</b>
Input Frequency	<b>60HZ</b>

Model_No:	E-BAL-H150-A0360N			Capacitor (Required)		
Input Voltage	120	277	347	Capacitance	16uF±3%	
Operating Current	3.7	1.6	1.3	Minimum Volts	280V	
Open Circuit Current	4.3	1.9	1.8	Dry	Diameter	1.58"
Starting Current	2.5	2.5	2.5		Height	2.86"
CCF (*ANSI≤1.8)	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	2.5	2.5	Ignitor (Required)		
	Input	2.2	0.9	0.8	Ignitor Model	IGN-02
Recommended Fuse	5	2	2	Pulse Height(kV)	3.0~4.0	
Input Voltage At Lamp Dropout				Pulse Width (≥u S)	1.0 @ 2.7	
UL 1029 Bench Top Rise	C	B	A	Insulation System		Class H, 180°C
OCV(Min.)	235			Ballast Dimension	A	2.29"
Input Power	185W				B	3.8"
Power Factor	≥90%			Ballast Net Weight		7.6 lbs
Regulation	Line Volts	±5%		Leads		12"-Cross Link Polyolefin
	Lamp Watts	±10%		Min.Starting Temp.		-20°F / -30°C

<h3>Ballast Dimension</h3> 	<h3>Wiring Diagram</h3> 
<h3>Ignitor</h3> 	<h3>Capacitor</h3> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.