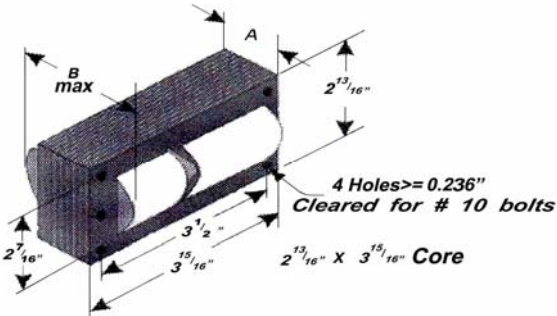
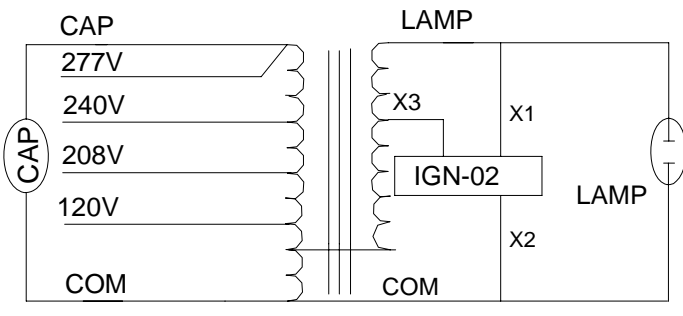
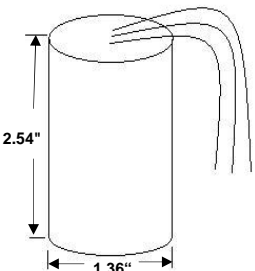
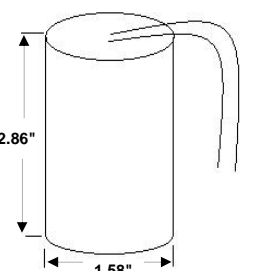


E-BAL-H150-AMT60N	
Ballast Type	Metal Halide
Lamp	150W M102
Circuit Type	HX-HPF
Input Frequency	60HZ

Model No:		E-BAL-H150-AMT60N				Capacitor (Required)		
Input Voltage		120	208	240	277	Capacitance	16uF±3%	
Operating Current		3.7	2.1	1.8	1.6	Minimum Volts	280V	
Open Circuit Current		4.3	2.5	2.2	1.9	Dry	Diameter	1.58"
Starting Current		2.5	2.5	2.5	2.5		Height	2.86"
CCF (*ANSI≤1.8)		1.8	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	2.5	2.5	2.5	2.5	Ignitor (Required)		
	Input	2.2	1.1	1.1	0.8	Ignitor Model	IGN-02	
Recommended Fuse		10	5	5	4	Pulse Height(kV)	3.0~4.0	
Input Voltage At Lamp Dropout						Pulse Width (≥u S)	1.0 @ 2.7	
UL 1029 Bench Top Rise			C	C	C			
	OCV(Min.)	235						
	Input Power	185W						
	Power Factor	≥90%						
Regulation	Line Volts	±5%						
	Lamp Watts	±10%						
Insulation System		Class H, 180°C						
Ballast Dimension	A	2.29"						
	B	3.8"						
Ballast Net Weight		7.0 lbs						
Leads		12"-Cross Link Polyolefin				Min.Starting Temp.	-20°F / -30°C	

<h3>Ballast Dimension</h3> 	<h3>Wiring Diagram</h3> 
<h3>Ignitor</h3> 	<h3>Capacitor</h3> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.