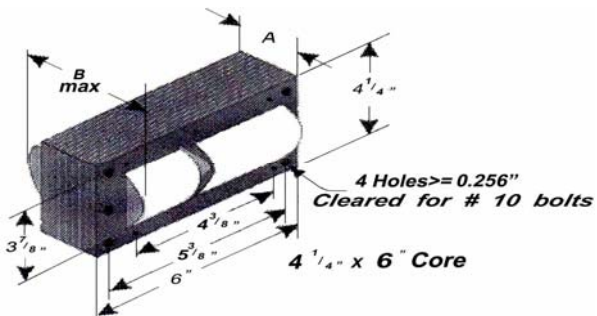
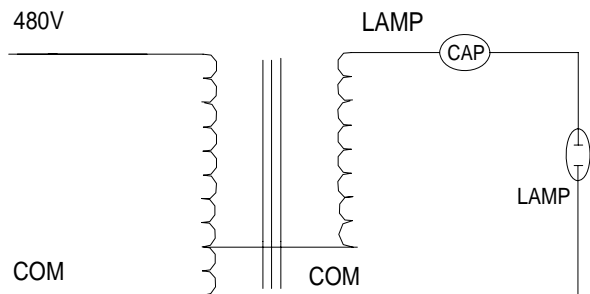
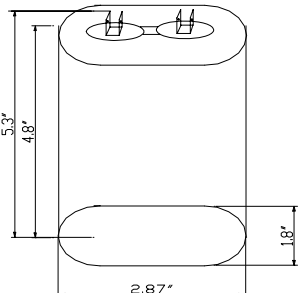


E-BAL-H1500-A4860N	
Ballast Type	<b>Metal Halide</b>
Lamp	<b>1500W M48</b>
Circuit Type	<b>CWA</b>
Input Frequency	<b>60HZ</b>

Model_No:	E-BAL-H1500-A4860N			Capacitor (Required)			
Input Voltage	480			Capacitance	32uF±3%		
Operating Current	3.4			Minimum Volts	525V		
Open Circuit Current	0.8			Dry	Diameter	2.87"	
Starting Current	8.2				Height	5.3"	
CCF (*ANSI≤1.8)	1.8			Case Max. Temperature			100°C
Short Circuit Current	Secondary	8.2		Ignitor (Not Required)			
	Input	3.4		Ignitor Model			
Recommended Fuse	10			Pulse Height(kV)			
Input Voltage At Lamp Dropout				Pulse Width (≥u S)			
UL 1029 Bench Top Rise	E						
	OCV(Min.)	440					
	Input Power	1625W					
	Power Factor	≥90%					
Regulation	Line Volts	±10%					
	Lamp Watts	±10%					
Insulation System	Class H, 180°C						
Ballast Dimension	A	4.2"					
	B	6.2"					
Ballast Net Weight	27.5 lbs						
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C		

Ballast Dimension	Wiring Diagram
	
	<p align="center"><b>Capacitor</b></p> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.