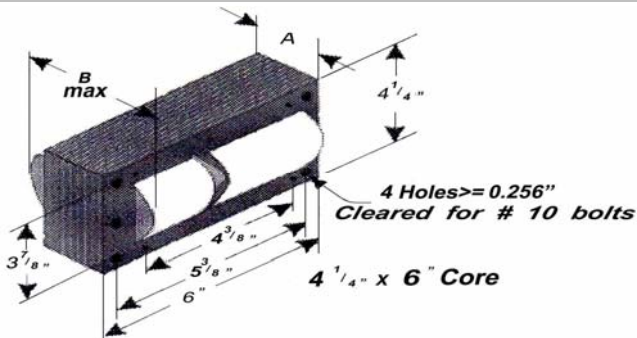
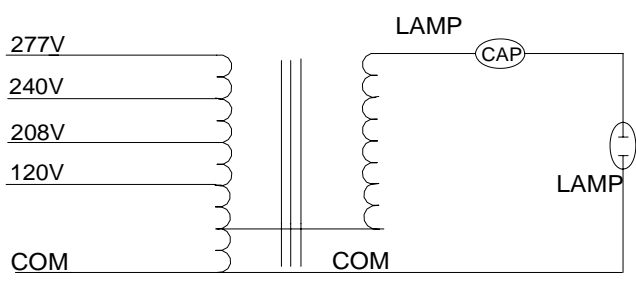
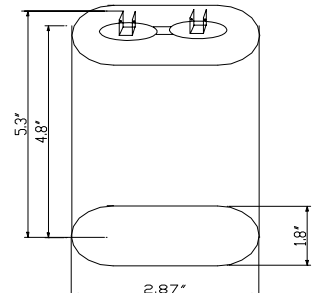


E-BAL-H1500-AMT60N	
Ballast Type	<b>Metal Halide</b>
Lamp	<b>1500W M48</b>
Circuit Type	<b>CWA</b>
Input Frequency	<b>60HZ</b>

Model No: E-BAL-H1500-AMT60N		Capacitor (Required)						
Input Voltage	120	208	240	277	Capacitance	32uF±3%		
Operating Current	13.5	7.8	6.8	5.9	Minimum Volts	525V		
Open Circuit Current	7.4	4.1	3.7	3.2	Dry	Diameter	2.87"	
Starting Current	7.6	7.6	7.6	7.6		Height	5.3"	
CCF (*ANSI≤1.8)	1.8	1.8	1.8	1.8	Case Max. Temperature	100°C		
Short Circuit Current	Secondary	7.6	7.6	7.6		Ignitor (Not Required)		
	Input	15.5	9	7.8	6.8	Ignitor Model		
Recommended Fuse	30	25	20	15	Pulse Height(kV)			
Input Voltage At Lamp Dropout					Pulse Width (≥u S)			
UL 1029 Bench Top Rise	G	E	E	G	Insulation System		Class H, 180°C	
OCV(Min.)	440	Regulation			Line Volts	±10%		
Input Power	1605W	Lamp Watts			Lamp Watts	±10%		
Power Factor	≥90%	Ballast Dimension			Insulation System		Class H, 180°C	
Regulation	Line Volts	A		4.2"	Ballast Dimension		A	4.2"
	Lamp Watts	B		6.2"	Ballast Dimension		B	6.2"
Insulation System	Ballast Net Weight		25.7 lbs		Leads		12"-Cross Link Polyolefin	
Min. Starting Temp.	Leads		12"-Cross Link Polyolefin		Min. Starting Temp.		-20°F / -30°C	

Ballast Dimension	Wiring Diagram
 <p><b>Ballast Dimension</b></p> <p>4 1/4" X 6" Core</p> <p>4 Holes ≥ 0.256" Cleared for # 10 bolts</p>	 <p><b>Wiring Diagram</b></p> <p>277V 240V 208V 120V COM</p> <p>LAMP CAP LAMP COM</p>
	 <p><b>Capacitor</b></p> <p>5.3" 4.8" 2.87" 1.8"</p>

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.

**IPP International Power Product**  
515 S.Yorbita Road  
City of Industry, CA 91744  
Toll Free: 1-888-539-5586