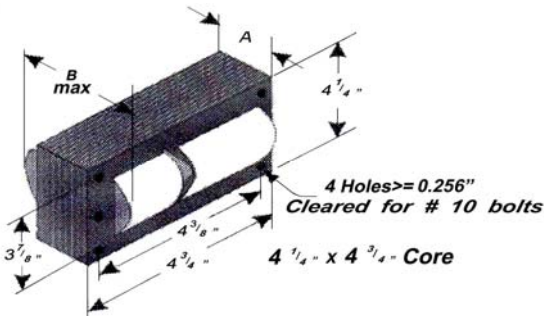
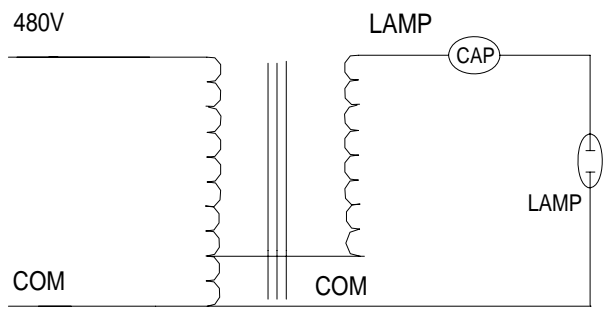
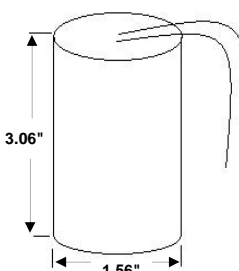


E-BAL-H250-A4860N	
Ballast Type	<b>Metal Halide</b>
Lamp	<b>250W M58</b>
Circuit Type	<b>CWA</b>
Input Frequency	<b>60HZ</b>

Model No:	E-BAL-H250-A4860N			Capacitor (Required)			
Input Voltage	480			Capacitance	15uF±3%		
Operating Current	0.7			Minimum Volts	400V		
Open Circuit Current	0.65			Dry	Diameter	1.56"	
Starting Current	2.5				Height	3.06"	
CCF (*ANSI≤1.8)	1.8			Case Max. Temperature			100°C
Short Circuit Current	Secondary	2.5		Ignitor (Not Required)			
	Input	0.85		Ignitor Model			
Recommended Fuse	2			Pulse Height(kV)			
Input Voltage At Lamp Dropout				Pulse Width (≥u S)			
UL 1029 Bench Top Rise	B						
OCV(Min.)	270						
Input Power	295W						
Power Factor	≥90%						
Regulation	Line Volts	±10%					
	Lamp Watts	±10%					
Insulation System	Class H, 180°C						
Ballast Dimension	A	1.7"					
	B	3.2"					
Ballast Net Weight	10.4 lbs						
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C		

<p><b>Ballast Dimension</b></p> 	<p><b>Wiring Diagram</b></p> 
	<p><b>Capacitor</b></p> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.