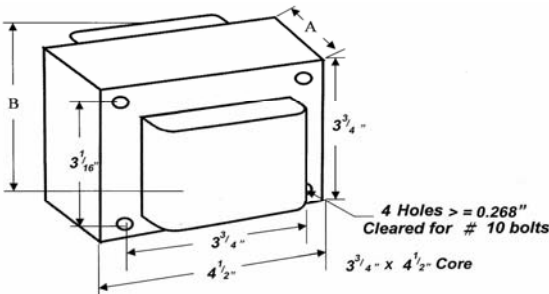
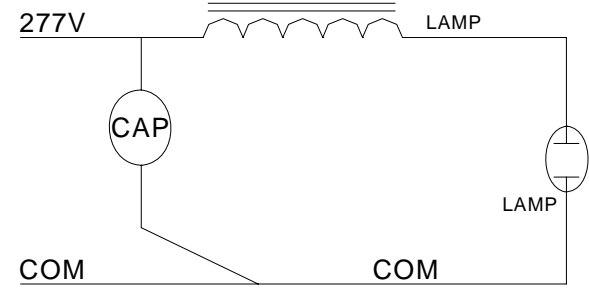
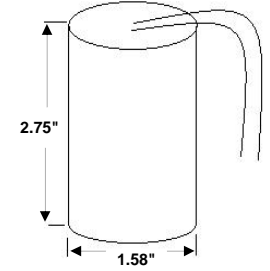


E-BAL-H400-A2760N	
Ballast Type	Metal Halide
Lamp	400W M59
Circuit Type	HPF
Input Frequency	60HZ

Model_No:	E-BAL-H400-A2760N			Capacitor (Required)			
Input Voltage	277			Capacitance	20uF±3%		
Operating Current	2.1			Minimum Volts	300V		
Open Circuit Current	2.13			Dry	Diameter	2.75"	
Starting Current	4.0				Height	1.58"	
CCF (*ANSI≤1.8)	1.8			Case Max. Temperature			100°C
Short Circuit Current	Secondary	4.0		Ignitor (Not Required)			
	Input	1.84		Ignitor Model			
Recommended Fuse	5			Pulse Height(kV)			
Input Voltage At Lamp Dropout				Pulse Width (≥u S)			
UL 1029 Bench Top Rise	A						
	OCV(Min.)	277					
	Input Power	425W					
	Power Factor	≥90%					
Regulation	Line Volts	±10%					
	Lamp Watts	±10%					
Insulation System	Class H, 180°C						
Ballast Dimension	A	2.13"					
	B	3.80"					
Ballast Net Weight	11.54 lbs						
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C		

<p>Ballast Dimension</p> 	<p>Wiring Diagram</p> 
	<p>Capacitor</p> 

When Ordering, add suffix for options:
 D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.