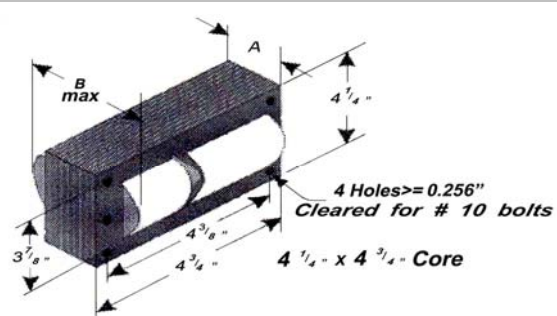
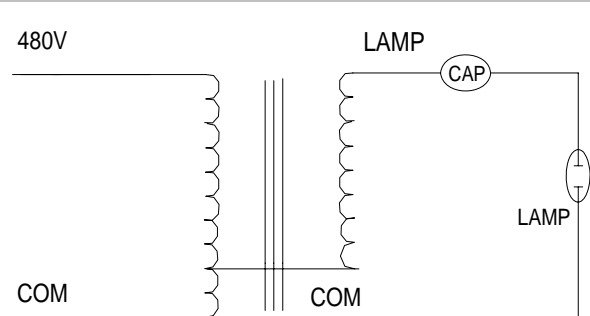
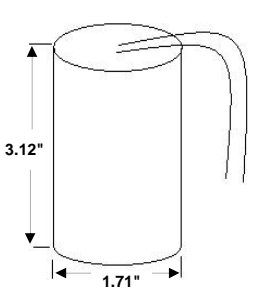


E-BAL-H400-A4860N	
Ballast Type	Metal Halide
Lamp	400W M59
Circuit Type	CWA
Input Frequency	60HZ

Model No:	E-BAL-H400-A4860N			Capacitor (Required)			
Input Voltage	480			Capacitance	24uF±3%		
Operating Current	1.0			Minimum Volts	400V		
Open Circuit Current	0.9			Dry	Diameter	1.71"	
Starting Current	4.0				Height	3.12"	
CCF (*ANSI≤1.8)	1.8			Case Max. Temperature			100°C
Short Circuit Current	Secondary	4.0		Ignitor (Not Required)			
	Input	1.2		Ignitor Model			
Recommended Fuse	4			Pulse Height(kV)			
Input Voltage At Lamp Dropout				Pulse Width (≥ u S)			
UL 1029 Bench Top Rise	E						
	OCV(Min.)	225					
	Input Power	462W					
	Power Factor	≥90%					
Regulation	Line Volts	±10%					
	Lamp Watts	±10%					
Insulation System	Class H, 180°C						
Ballast Dimension	A	2.0"					
	B	4.1"					
Ballast Net Weight	11.5 lbs						
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C		

<p>Ballast Dimension</p> 	<p>Wiring Diagram</p> 
	<p>Capacitor</p> 

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.