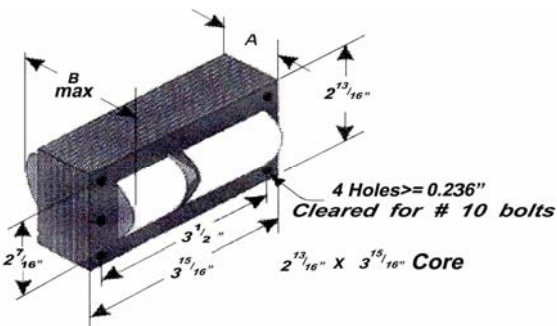
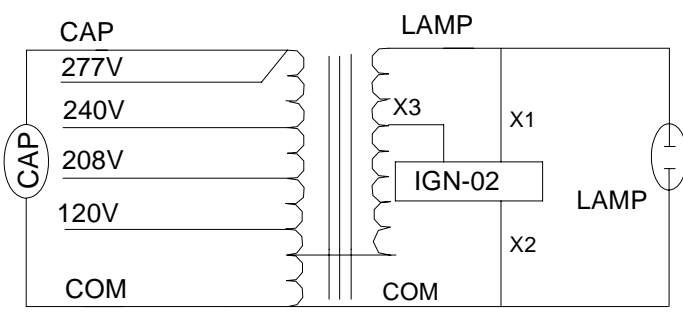
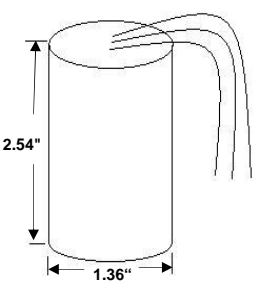
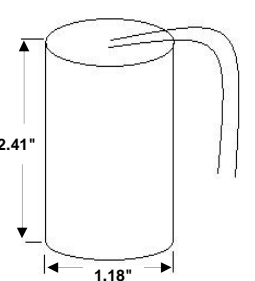


E-BAL-H50-AMT60N	
Ballast Type	Metal Halide
Lamp	50W M110
Circuit Type	HX-HPF
Input Frequency	60HZ

Model No: E-BAL-H50-AMT60N		Capacitor (Required)						
Input Voltage	120	208	240	277	Capacitance	6uF±3%		
Operating Current	1.0	0.87	0.7	0.5	Minimum Volts	280V		
Open Circuit Current	1.4	0.8	0.78	0.6	Dry	Diameter	1.18"	
Starting Current	0.7	0.68	0.68	0.68		Height	2.41"	
CCF (*ANSI≤1.8)	1.8	1.8	1.8	1.8	Case Max. Temperature		100°C	
Short Circuit Current	Secondary	0.68	0.68	0.68	Ignitor (Required)			
	Input	0.8	0.6	0.5	0.3	Ignitor Model	IGN-02	
Recommended Fuse	3	3	2	2	Pulse Height(kV)	3.0~4.0		
Input Voltage At Lamp Dropout					Pulse Width (≥u S)	1.0 @ 2.7		
UL 1029 Bench Top Rise	A	A	A	A				
OCV(Min.)	235							
Input Power	67W							
Power Factor	≥90%							
Regulation	Line Volts	±5%						
	Lamp Watts	±10%						
Insulation System	Class H, 180°C							
Ballast Dimension	A	1.1"						
	B	2.3"						
Ballast Net Weight	3.6 lbs							
Coil Material (Pri. / Sec.):	Al / Al							
Leads	12"-Cross Link Polyolefin				Min.Starting Temp.	-20°F / -30°C		

Ballast Dimension	Wiring Diagram
	
Ignitor	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.