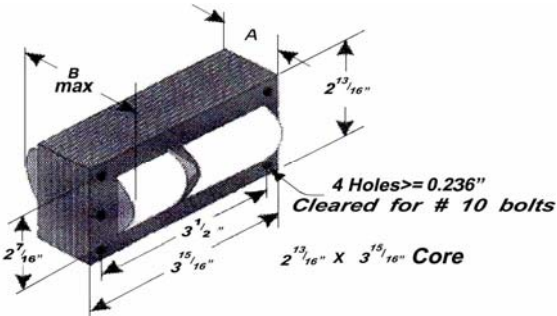
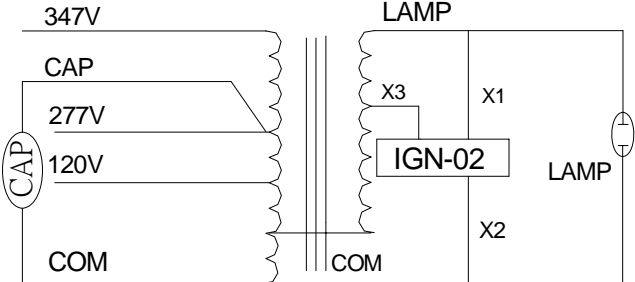
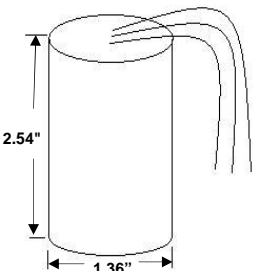
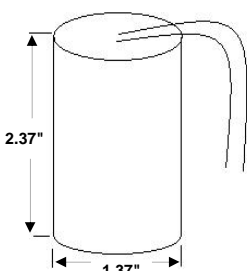


E-BAL-H70-A0360N	
Ballast Type	Metal Halide
Lamp	70W M98
Circuit Type	HX-HPF
Input Frequency	60HZ

Model_No: E-BAL-H70-A0360N					Capacitor (Required)		
Input Voltage	120	277	347	Capacitance		8uF±3%	
Operating Current	1.9	0.8	0.7	Minimum Volts		280V	
Open Circuit Current	2.3	1.0	0.92	Dry	Diameter	1.37"	
Starting Current	1.28	1.28	1.28		Height	2.37"	
CCF (*ANSI≤1.8)	1.8	1.8	1.8	Case Max. Temperature			100°C
Short Circuit Current	Secondary	1.28	1.28	Ignitor (Required)			
	Input	0.8	0.45	0.43	Ignitor Model	IGN-02	
Recommended Fuse	4	2	2	Pulse Height(kV)	3.0~4.0		
Input Voltage At Lamp Dropout				Pulse Width (≥u S)	1.0 @ 2.7		
UL 1029 Bench Top Rise		A	A				
OCV(Min.)	230						
Input Power	90W						
Power Factor	≥90%						
Regulation	Line Volts	±5%					
	Lamp Watts	±10%					
Insulation System	Class H, 180°C						
Ballast Dimension	A	1.5"					
	B	2.92"					
Ballast Net Weight	5.4 lbs						
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C		

Ballast Dimension	Wiring Diagram
	
Ignitor	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.