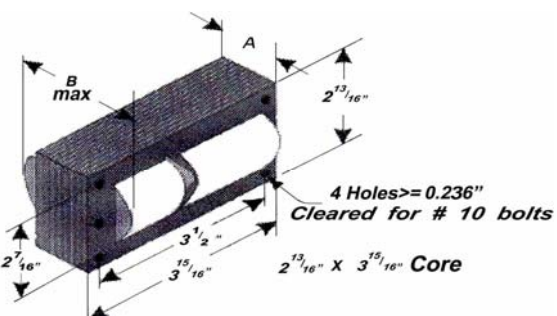
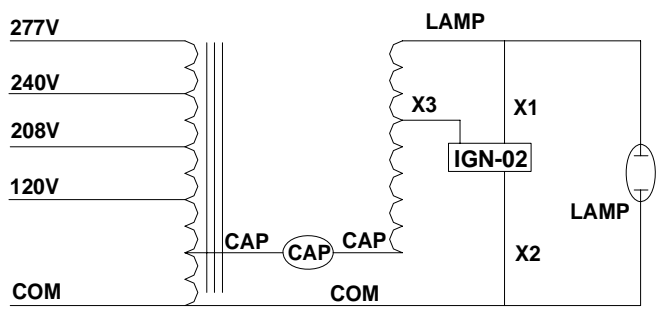
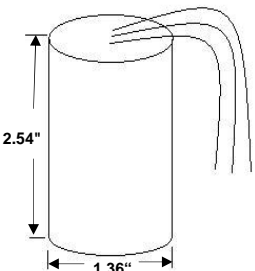
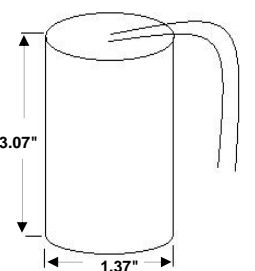


E-BAL-H175-AMT60N-PS	
Ballast Type	Metal Halide
Lamp	175W M137/M152
Circuit Type	Pulse Start CWA
Input Frequency	60HZ


Model No: E-BAL-H175-AMT60N-PS					Capacitor (Required)		
Input Voltage	120	208	240	277	Capacitance	11uF±3%	
Operating Current	1.9	1.1	0.9	0.8	Minimum Volts	370V	
Open Circuit Current	2.4	1.4	1.2	1.1	Dry	Diameter	1.37"
Starting Current (*ANSI:1.5~2.3)	2.2	2.2	2.2	2.2		Height	3.07"
CCF (*ANSI≤1.8)	1.7	1.7	1.7	1.7	Case Max. Temperature		100°C
Short Circuit Current	Secondary	1.9	1.9	1.9	Ignitor (Required)		
	Input	0.7	0.5	0.4	0.3	Ignitor Model	IGN-02
Recommended Fuse	6	4	3	3	Pulse Height(kV)	3.0~4.0	
Input Voltage At Lamp Dropout					Pulse Width (≥u S)	1.3 @ 2.7	
UL 1029 Bench Top Rise	C	C	C	C	Regulation		
OCV(Min.)	254				Line Volts	±10%	
Input Power	198.5W				Lamp Watts	±10%	
Power Factor	≥90%				Insulation System		
Regulation	Line Volts	Class H, 180°C					
	Lamp Watts						
Ballast Dimension	A	2.76"					
	B	4.22"					
Ballast Net Weight	8.8 lbs						
Leads	12"-Cross Link Polyolefin					Min.Starting Temp.	-20°F / -30°C

Ballast Dimension	Wiring Diagram
	
Ignitor	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.

 - 2009 Energy Code Compliant.