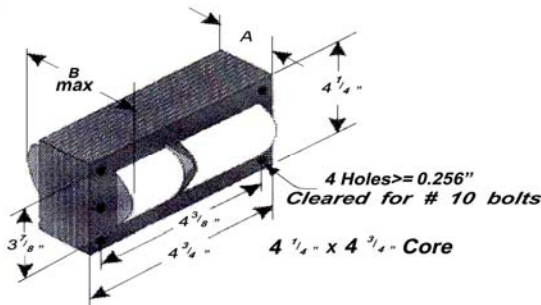
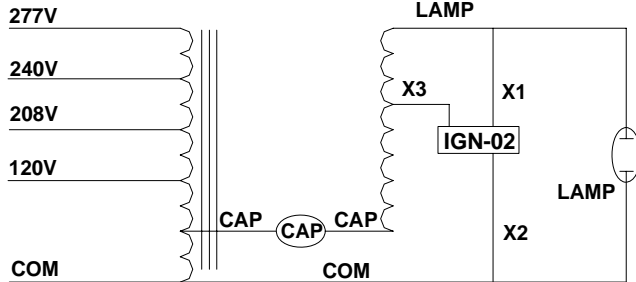
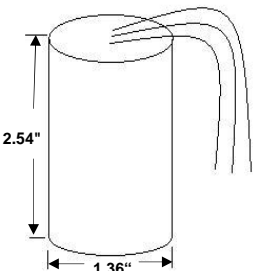
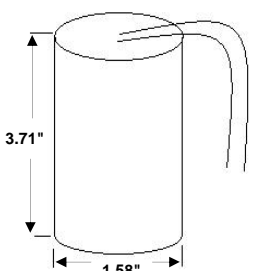


E-BAL-H320-AMT60N-PS	
Ballast Type	Metal Halide
Lamp	320W M132/M154 / M170
Circuit Type	Pulse Start CWA
Input Frequency	60HZ


Model No: E-BAL-H320-AMT60N-PS		Capacitor (Required)						
Input Voltage	120	208	240	277	Capacitance	21uF±3%		
Operating Current	3.3	1.9	1.7	1.4	Minimum Volts	350V		
Open Circuit Current	2.0	1.2	1.1	0.9	Dry	Diameter	1.58"	
Starting Current (*ANSI:2.8-4.2)	3.5	3.5	3.5	3.5		Height	3.71"	
CCF (*ANSI≤1.8)	1.2	1.2	1.2	1.2	Case Max. Temperature		100°C	
Short Circuit Current	Secondary	3.5	3.5	3.5	Ignitor (Required)			
	Input	0.8	0.4	0.4	0.4	Ignitor Model	IGN-02	
Recommended Fuse	8	6	5	3	Pulse Height(kV)	3.0-4.0		
Input Voltage At Lamp Dropout					Pulse Width (≥u S)	1.3 @ 2.7		
UL 1029 Bench Top Rise	B	B	B	B				
OCV(Min.)	254							
Input Power	363W							
Power Factor	≥90%							
Regulation	Line Volts	±10%						
	Lamp Watts	±10%						
Insulation System	Class H, 180°C							
Ballast Dimension	A	2.3"						
	B	3.9"						
Ballast Net Weight	12.7 lbs							
Leads	12"-Cross Link Polyolefin				Min.Starting Temp.	-20°F / -30°C		

Ballast Dimension	Wiring Diagram
	
Ignitor	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.

 - 2009 Energy Code Compliant.

IPP International Power Product

515 S.Yorbita Road
City of Industry, CA 91744
Toll Free: 1-888-539-5586