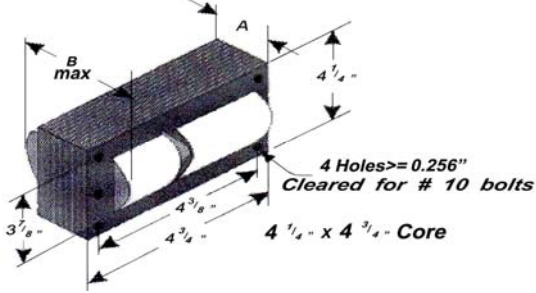
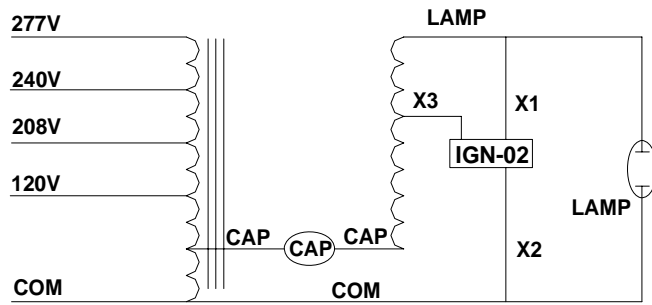
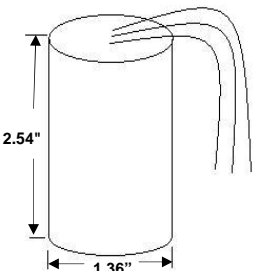
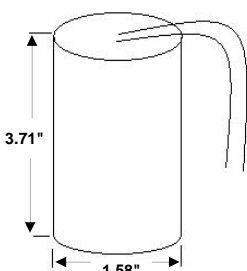


E-BAL-H350-AMT60N-PS	
Ballast Type	Metal Halide
Lamp	350W M131
Circuit Type	Pulse Start CWA
Input Frequency	60HZ


Model No: E-BAL-H350-AMT60N-PS					Capacitor (Required)		
Input Voltage	120	208	240	277	Capacitance	23uF±3%	
Operating Current	3.4	2.0	1.7	1.5	Minimum Volts	350V	
Open Circuit Current	2.0	1.2	1.1	0.9	Dry	Diameter	1.58"
Starting Current (*ANSI:2.8-4.2)	3.5	3.5	3.5	3.5		Height	3.71"
CCF (*ANSI≤1.8)	1.8	1.8	1.8	1.8	Case Max. Temperature		100°C
Short Circuit Current	Secondary	3.5	3.5	3.5	Ignitor (Required)		
	Input	0.8	0.4	0.4	0.4	Ignitor Model	IGN-02
Recommended Fuse	10	7	5	5	Pulse Height(kV)	3.0~4.0	
Input Voltage At Lamp Dropout					Pulse Width (≥u S)	1.3 @ 2.7	
UL 1029 Bench Top Rise	D	C	C	C			
OCV(Min.)	254						
Input Power	397W						
Power Factor	≥90%						
Regulation	Line Volts	±10%					
	Lamp Watts	±10%					
Insulation System	Class H, 180°C						
Ballast Dimension	A	2.3"					
	B	3.9"					
Ballast Net Weight	12.5 lbs						
Leads	12"-Cross Link Polyolefin				Min.Starting Temp.	-20°F / -30°C	

Ballast Dimension	Wiring Diagram
	
Ignitor	Capacitor
	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.

 - 2009 Energy Code Compliant.

IPP International Power Product

515 S.Yorbita Road
City of Industry, CA 91744
Toll Free: 1-888-539-5586