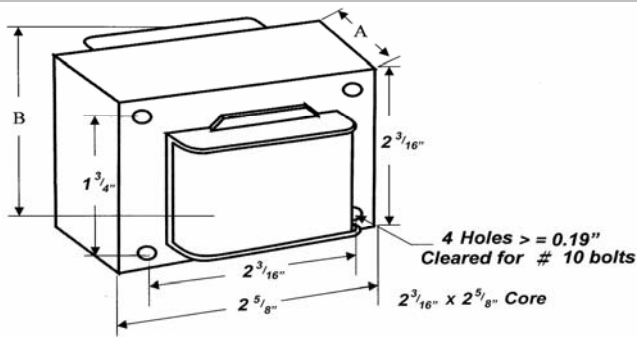
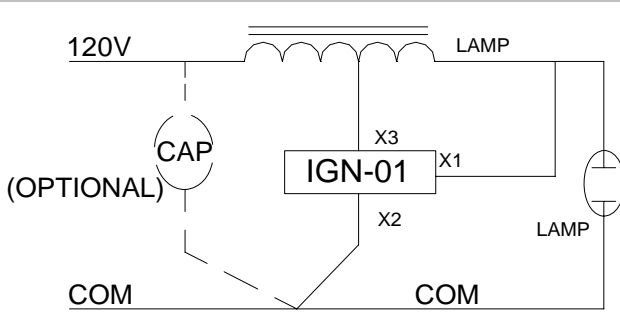
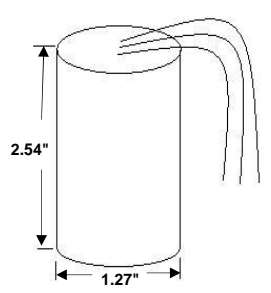


E-BAL-S007S	
Ballast Type	High Pressure Sodium
Lamp	70W S62
Circuit Type	R-NPF
Input Frequency	60HZ

Model No:	E-BAL-S007S			Capacitor (Not Required)	
Input Voltage	120			Capacitance	
Operating Current	2.1			Minimum Volts	
Open Circuit Current	2.32			Dry	Diameter
Starting Current	2.4				Height
CCF (*ANSI≤1.8)	1.8			Case Max. Temperature	
Short Circuit Current	Secondary	2.4			
	Input	2.32			
Recommended Fuse	8			Ignitor (Required)	
Input Voltage At Lamp Dropout				Ignitor Model	IGN-01
UL 1029 Bench Top Rise	A			Pulse Height(kV)	2.5~4.0
	OCV(Min.)	110		Pulse Width (≥u S)	1us@ 2250v
	Input Power	78W			
	Power Factor	0.3-0.5			
Regulation	Line Volts	±5%			
	Lamp Watts	±10%			
Insulation System	Class H, 180°C				
Ballast Dimension	A	1.18"			
	B	2.4"			
Ballast Net Weight	2.0 lbs				
Leads	12"-Cross Link Polyolefin			Min.Starting Temp.	-20°F / -30°C

Ballast Dimension	Wiring Diagram
	
<p>Ignitor</p> 	

When Ordering, add suffix for options:

D - with distributor replacement kit (include bracket, capacitor and ignitor as necessary)

Specifications are subject to change without notice.